

RG11 STANDARD SHIELD COAXIAL CABLE



vertical cable

DESCRIPTION

RG11 Standard Shield, 14AWG Solid CCS Conductor, Aluminum Foil with 60% Braid, CL2, CM, PVC Jacket.

FEATURES

- 14AWG Solid Conductor
- 75 Ohm Impedance
- Flame Retardant PVC Jacket
- Meets NEC Article 820 V Rating
- ISO 9001:2000
- RoHS Compliant
- 1000ft Wooden Spool

SKU: 107-1032BK/R11

Construction


Conductor	Copper Clad Steel (CCS)
Size	1.63±0.01mm (14AWG)
Dielectric	Foam PE
Size	7.11±0.05mm
Shield	Bonded Aluminum Foil
Braid	Alu-Mag
Coverage	60%x16x4x0.16±0.005mm
Jacket	PVC
Size	10.03±0.2mm

Electrical Characteristics

Sparker Test	4000VAC
Impedance	75±3 Ohm
Capacitance	54±3pF/m
Velocity of Propagation	85%
Return Loss	20dB min (5-2300MHz)

Mechanical Characteristics

Operating Temperature Range -40°C to 75°C

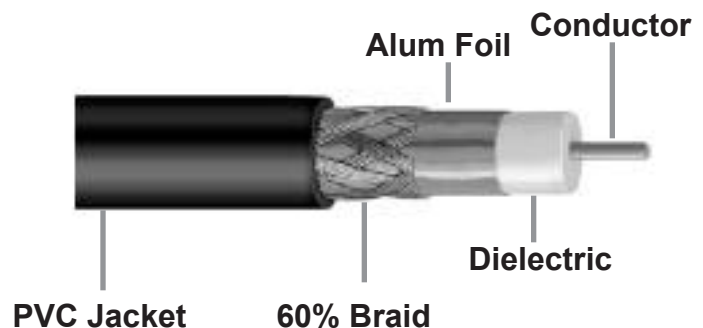

VERTICAL CABLE

954 454-3554 Florida Office
951 696-7772 California Office

www.verticalcable.com

Rev. 02/2011