

FIBER OPTIC PATCH CORD

OM3 Multimode Duplex (Aqua)



SKU: 263-LCLC

Technical Data

Fiber Type	50/125 μ m
Polish	PC
Jacket	PVC (OFNR)
Overall Diameter	2.0mm
Optical Specifications	
Typical Insertion Loss	≤ 0.20 dB
Max Insertion Loss	≤ 0.25 dB
Durability (500 Mating Times)	I.L. ≤ 0.25 db
Tensile Load	7.0 kg
Bend Radius	3.8cm
Operating Temperature	-20°C ~ +75°C
Storage Temperature	-20°C ~ +85°C

Jacket Print



OPTICAL CABLE OM3 50/125 MM-2.0x4.1 OFNR

DESCRIPTION

OM3 Multimode Duplex Fiber Optic Patch Cord.

FEATURES

- OM3 Multimode Duplex
- GR-326-Core
- RoHS Compliant
- Performance according to IEC
- Meets Telcordia Standards
- LC-LC connector
- 1m/2m/3m/5m/7m/10m/15m lengths available

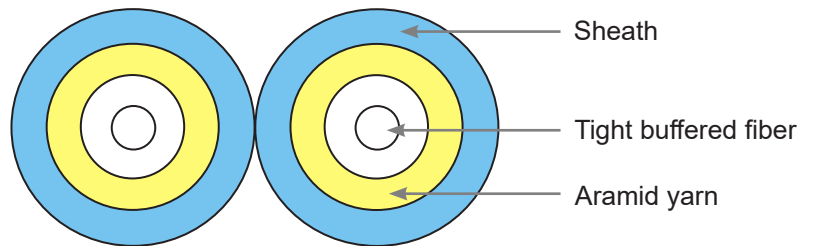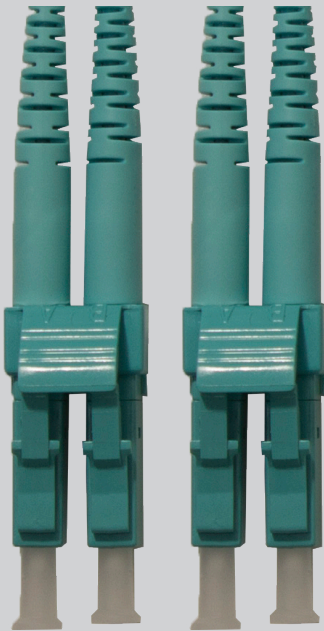

OM3 Cable

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 07/2016

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.