

# FIBER OPTIC PATCH CORD

## OM3 Multimode Duplex (Aqua)



### DESCRIPTION

OM3 Multimode Duplex Fiber Optic Patch Cord.

### FEATURES

- OM3 Multimode Duplex
- GR-326-Core
- RoHS Compliant
- Performance according to IEC
- Meets Telcordia Standards
- LC-ST connector
- 1m/2m/3m/5m/7m/10m/15m lengths available




**SKU: 263-LCST**

#### Technical Data

<b>Fiber Type</b>	50/125 $\mu$ m
Polish	PC
<b>Jacket</b>	<b>PVC (OFNR)</b>
Overall Diameter	2.0mm
<b>Optical Specifications</b>	
Typical Insertion Loss	$\leq 0.20$ dB
Max Insertion Loss	$\leq 0.25$ dB
Durability (500 Mating Times)	I.L. $\leq 0.25$ db
Tensile Load	7.0 kg
Bend Radius	3.8cm
Operating Temperature	-20°C ~ +75°C
Storage Temperature	-20°C ~ +85°C

#### Jacket Print

OPTICAL CABLE OM3 50/125 MM-2.0x4.1 OFNR

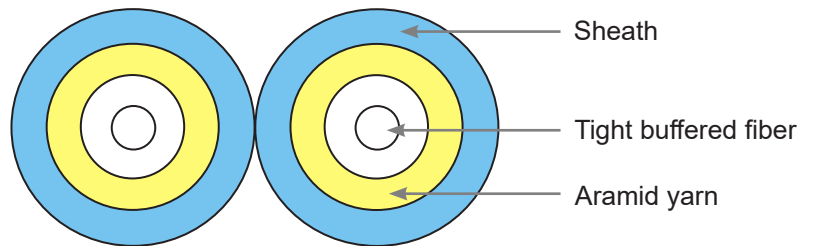

OM3 Cable

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 07/2016

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.