

# CAT5E DATA JACK

## 90° DEGREE STYLE (SHIELDED)




### DESCRIPTION

Category 5E Shielded Data Grade Keystone Jack 90° Degree 8x8 Conductors.

### FEATURES

- 360° Shielding Structure to prevent EMI
- 110-IDC Contacts (Terminal Block)
- Color Coded for 568A and 568B
- EIA/TIA 568A/B standards
- ANSI/TIA-568-C.2 , ISO/IEC11801, EN50173-1
- Thermoplastic ABS Housing
- RoHS Compliant

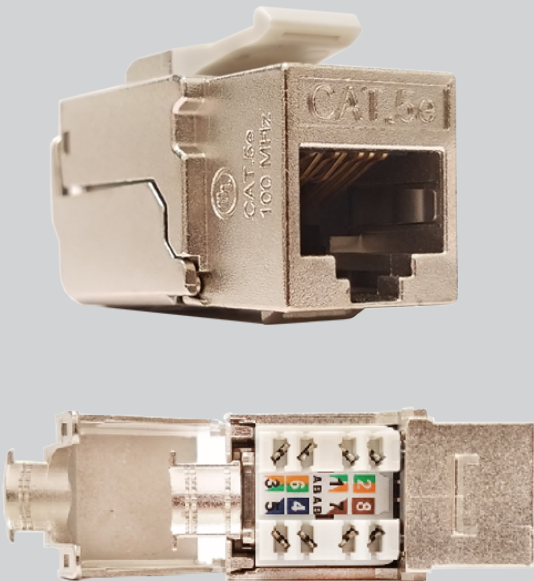

### SKU: 301-J2630/S

#### Physical Specifications

Dimension (mm) 19.35H x 21W x 46.83D

#### Housing Material

Housing & Cap Polycarbonate

#### Contact Material

IDC 110 Contacts 100μ Inch nickel plated over phosphor bronze  
 IDC Operating Life Minimum 250 re-terminations  
 Jack Contact Phosphor bronze, 50μ inch gold plating over nickel  
 Jack Operating Life Minimum 750 insertions  
 Compatibility 23 to 26 AWG (solid)

#### Shielded Cover


50~60μ inch nickel plated over phosphor bronze

#### Product Qualifications

ANSI/TIA-568-C.2  
 ETL Listed

#### Electrical:

Dielectric strength 1000V RMS for 1min  
 Insulation resistance 10mΩ min  
 Contact Resistance 2mΩ per contact  
 Temperature Range -10°C to 60°C max  
 Humidity 10%~65%

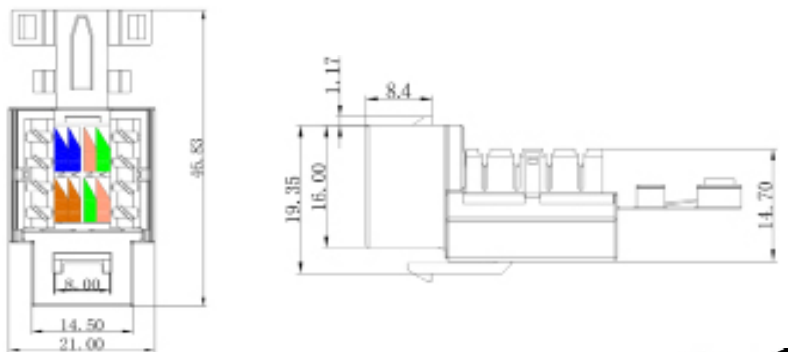

## VERTICAL CABLE

954 454-3554 Florida Office  
 951 696-7772 California Office



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 10/2017  
 Subject to change without notice.