

CAT5E JUNCTION BOX SPLICE BOX



SKU: 040-371/C5J/WH

Material:

ABS, UL 94V-10
IDC Housing: PC+Glass Fiber, UL 94V-2
IDC Terminal: Phospor Bronze with Tin plating.
PCB: FR4, UL 94V-0

Performance


Suitable for 22-26 AWG solid wire
Operating temperature: -10°C to 60°C
ISO/IEC 11801, ANSI/TIA/EIA 568 B.2

DESCRIPTION

Cat5E Junction Box, 568A and 568B Standards, Compatible with 110 & Krone Termination tools.

FEATURES

- High-impact ABS construction
- Screws, ties and adhesive tape included
- 110 & Krone type terminal blocks
- T568A & T568B color codes
- UL 94 V-0 Fire Retardant
- UL listed




33.71 ± 0.2



20.4 ± 0.2

61.61 ± 0.2

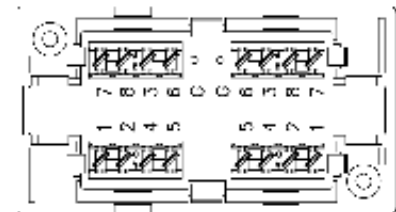

VERTICAL CABLE

954 454-3554 Florida Office
951 696-7772 California Office



www.verticalcable.com

Rev. 02/2013
Subject to change without notice.