



CAT5E DIRECT BURIAL 25P GEL FILLED (FLOODED CORE)

SKU: 059-488/CMXF25P

DESCRIPTION

Category-5E CMXF Direct Burial, Flooded Core, 50-Conductor, Outdoor Jacket, AWG24 Solid-Bare Copper.

FEATURES

- High-Performance Data Cable
- 25 Pair Category-5E Unshielded Twisted Pair
- Easily Identified Color-Striped Pairs
- 24AWG Solid Copper Conductors
- Exceeds TIA/EIA-568C.2
- Direct Burial Gel Filled (Flooded Core)
- ETL Listed, RoHS Compliant
- 1000ft Wooden Spool

Technical Data

Rated Temperature	-40~70 °C
Rated Voltage	60V
Conductor	Solid Bare Copper
Size	24 AWG
Insulation	PE
Average Thickness (mm)	0.235
Insulation Diameter (±0.005mm)	0.97
Twisted Pair Diameter (±0.01)	1.94
Filler	PVC
Gel	Yes
PE Tape	Yes
Assembly Dia.	10.80mm
Jacket	LLDPE (UV)
Average Thickness (mm)	1.20
Outer Diameter (±0.10mm)	13.20
Rip Cord	Yes

Color of Pairs

Pair1:Blue-White Pair2:Orange-White Pair3:Green-White
Pair4:Brown-White Pair5:Gray-White Pair6: Blue-Red
Pair7:Orange-Red Pair8:Green-Red Pair9:Brown-Red
Pair10:Gray-Red Pair11:Blue-Black Pair12:Orange-Black
Pair13:Green-Black Pair14:Brown-Black Pair15:Gray-Black
Pair16:Blue-Yellow Pair17:Orange-Yellow Pair18:Green-Yellow
Pair19:Brown-Yellow Pair20:Gray-Yellow Pair21:Blue-Violet
Pair22:Orange-Violet Pair23:Green-Violet Pair24:Brown-Violet
Pair25:Gray-Violet


Mechanical Characteristics

Test Object	Jacket
Test Material	LLDPE
Before Tensile Strength (Mpa)	≥13.8
Aging Elongation (%)	≥100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	≥85% of unaged
Aging Elongation (%)	≥50% of unaged
Cold Bend (-40±2° Cx4hrs)	No Crack
Bend Radius (mm)	180

Marking on Jacket

VERTICAL 4001453 cETLus VERIFIED UTP 25PR 24AWG OUTDOOR DIRECT BURIAL (FLOODED) UV LLDPE CAT5E 350MHz TIA/EIA-568C.2 RoHS (SEQUENTIAL FOOT MARKERS ON JACKET)

Jacket color available in
Black

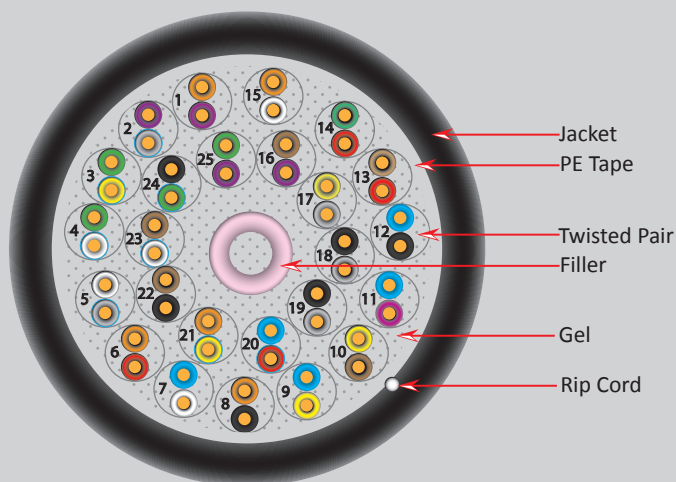

VERTICAL CABLE

800.749.2447 Florida
951.696.7772 California
845.391.8318 New York



www.verticalcable.com

Rev. 02/2017

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.

CAT5E DIRECT BURIAL GEL FILLED (FLOODED CORE)

PERFORMANCE

Electrical Characteristics:

1.0-100MHz Impedance (Ohms)	100±15
1.0-100.0MHz Delay Skew (ns/100m)	≤45
Pair-to-Ground Capacitance Unbalance (pF/100m)	≤330
Max. Conductor DC Resistance 20°C (ohms/km)	95
Resistance Unbalance (%)	≤5

Frequency (Mhz)	Return Loss (Min dB)	Attenuation Max (dB/100m)	Next (Min dB)
0.772	16.7	1.8	64.0
1	17.0	2.0	62.3
4	18.8	4.1	53.3
8	19.7	5.8	48.8
10	20.0	6.5	47.3
16	20.0	8.2	44.3
20	20.0	9.3	42.8
25	19.3	10.4	41.3
31.25	18.6	11.7	39.9
62.5	16.5	17.0	35.4
100	15.1	22.0	32.3

Frequency (Mhz)	PSNext (Min dB)	ELFEXT Min(dB/100m)	Delay Max(ns/100m)
0.772	64.0	63.0	574.0
1	62.3	60.8	570.0
4	53.3	48.7	552.0
8	48.8	42.7	546.0
10	47.3	40.8	545.0
16	44.3	36.7	543.0
20	42.8	34.7	542.0
25	41.3	32.8	541.0
31.25	39.9	30.9	540.0
62.5	35.4	24.8	538.0
100	32.3	20.8	537.0

VERTICAL CABLE

800.749.2447 Florida
951.696.7772 California
845.391.8318 New York



www.verticalcable.com

Rev. 02/2017

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.