

RG11 PLENUM RATED (95% BRAID)




DESCRIPTION

RG11 Plenum Rated, 14AWG Solid Bare Copper Conductor, 95% Tinned Copper Braid.

FEATURES

- 14AWG Solid BC Conductor
- 95% Tinned Copper Braid
- 75 Ohm Impedance
- UL Listed, RoHS Compliant
- 1000ft Wood Spool

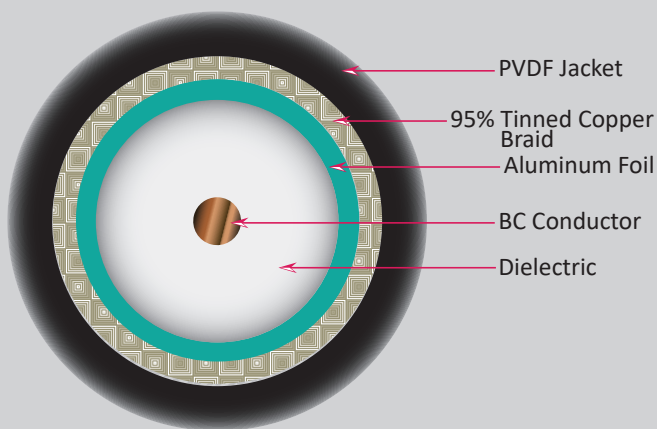

SKU: 107-1034/R11PBK

Construction

Conductor	Bare Copper
Conductor Size	14AWG
Dielectric	Foam FEP
Dielectric Size	0.280"±0.005"
Shield	Aluminum/Mylar/Aluminum 100% Coverage
Braid	Tinned Copper
Braid Coverage	95%
Jacket	PVDF (CMP Rated)
Jacket Diameter	0.350" ±0.006"
Jacket Color	Black

Electrical Characteristics

DC Resistance	2.5 Ω/Mft @20°C
Shield DC Resistance	1.5 Ω/Mft @20°C
Impedance	75±3 Ohm
Capacitance	16.2 pF/ft
Velocity of Propagation	83%
Return Loss	>-23dB Nom (1-1500MHz) >-21dB Nom (1500-3000MHz) >-20dB Nom (3000 -4500MhZ)

Jacket Print

AVPRG11HDTV HD/SDI 75 Ω RG11 COAX CABLE
14 AWG CMP C(UL)US 150° C FT-6 MADE IN THE USA
ROHS COMPLIANT XXXFT (FT MARKING)

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 01/2017

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.

RG11 STANDARD SHIELD PLENUM RATED (95% BRAID)

PERFORMANCE

Mechanical Characteristics:

Attenuation			
Frequency (MHz)	Max (dB/100ft)	Frequency (MHz)	Max (dB/100ft)
1	0.14	1000	5.23
3.6	0.25	1500	6.80
10	0.40	2250	9.07
71.5	1.04	3000	10.14
135	1.45	4500	13.30
270	2.20		
360	2.68		
720	4.20		

Standards

- Cable suitable for installations under NEC (NFPA 70) article 800 guidelines
- UL listed as Type CMP c(UL)us 75'c per UL standard 444
- Meets or exceeds the requirements of SMPTE 292M and 424M standards for HD/SDI
- Maximum operating voltage: 300V
- All materials used in the manufacture of this cable are RoHS compliant
- Made in the USA

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 01/2017

Subject to change without notice