



VERTICAL CABLE


Simply Connect.

DESCRIPTION

RG59 Direct Burial, 20AWG Solid Bare Copper Conductor with 95% Bare Copper Braid, CL2, CM, Polyethylene Jacket.

FEATURES

- 95% Bare Copper Braid
- 20AWG Solid Conductor
- Direct Burial (Gel Filled)
- Polyethylene Jacket (PE)
- 75 Ohm Impedance
- ISO 9001:2000
- RoHS Compliant
- 1000ft Wooden Spool

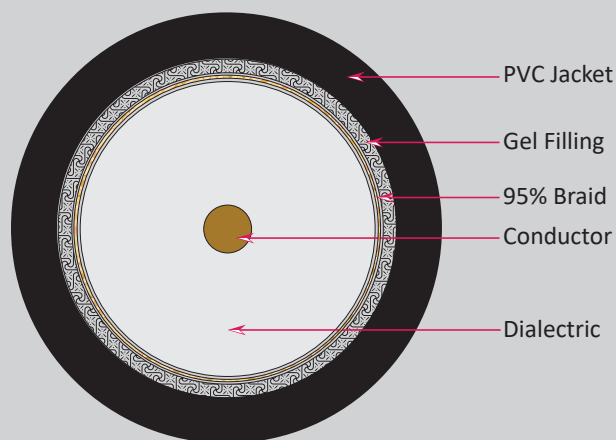

RG59 DIRECT BURIAL WITH 95% COPPER BRAID

SKU: 107-2175/DB/BK

Construction

Conductor

Diameter

Dielectric

Diameter

Braid

Coverage

Gel Filled

Jacket

Diameter

Bare Copper

0.81±0.005mm (20AWG)

Foam PE

3.660±0.10mm

Bare Copper

95%×16×9×0.12±0.005mm

Yes (Waterproof)

Polyethylene (PE)

6.10±0.10mm

Electrical Characteristics

Sparker Test

3000VAC

Impedance

75±3 Ohm

Capacitance

54±3pF/m

Velocity of Propagation

85%

Return Loss

(1~470Mz)≥25dB

(470~1000Mz)≥22dB

Mechanical Characteristics

Operating Temperature Range 60°C

Jacket color available in
Black

VERTICAL CABLE

954 454-3554 Florida Office

951 696-7772 California Office



www.verticalcable.com

Rev. 11/2012