

RG59 SIAMESE 95% BRAID DIRECT BURIAL (CM)




VERTICAL CABLE
Simply Connect.

DESCRIPTION

RG59 Siamese Direct Burial, 20AWG Solid Bare Copper Conductor with 95% CCA Braid, 18/2 Power cables, CL2, CM, Polyethylene Jacket.

FEATURES

- 95% Bare Copper Braid
- 20AWG Solid Conductor
- 18AWG (2) Conductors
- Direct Burial (Gel Filled)
- Polyethylene Jacket (PE)
- 75 Ohm Impedance
- ISO 9001:2000, RoHS Compliant
- 500ft Reel in Box

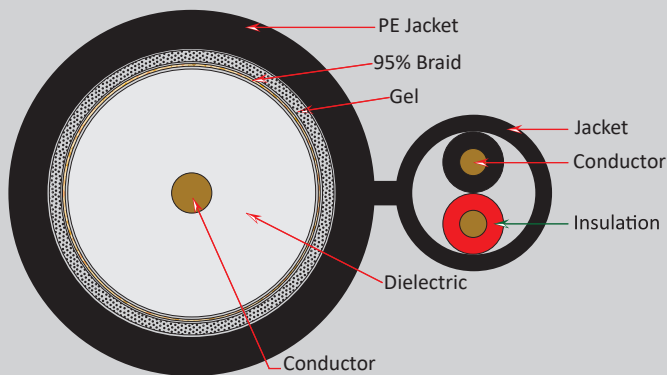

SKU: 107-2313/DB/BK

Coax Construction

Conductor

Diameter

Dielectric

Diameter

Braid

Coverage

Gel Filled

Jacket

Diameter

18AWG/2C

Conductor

Diameter

Insulation

Diameter

Jacket

Diameter

Electrical Characteristics

Sparker Test

Impedance

Capacitance

Velocity of Propagation

Return Loss

Bare Copper

0.81±0.005mm (20AWG)

Foam PE

3.660±0.10mm

Copper Clad Aluminum

95%×16×9×0.12±0.005mm

Yes (Waterproof)

Polyethylene (PE)

6.10±0.10mm

Bare Copper

7×0.38mm (18AWG)

Polythene (Black, Red)

1.83mm

Polyethylene (PE)

4.50±0.10mm

3000VAC

75±3 Ohm

54±3pF/m

85%

(1~470Mz)≥25dB

(470~1000Mz)≥22dB

Mechanical Characteristics

Operating Temperature Range

60°C

Jacket color available in
Black

VERTICAL CABLE

954 454-3554 Florida Office

951 696-7772 California Office



www.verticalcable.com

Rev. 10/2013

Subject to change without notice.