

# 14AWG 4C AUDIO CABLE DIRECT BURIAL (105 STRAND)




## DESCRIPTION

14AWG, 4 Conductor, High Strand Audio Cable, (105 Strand), Direct Burial Cable, UV Rated Outer Jacket, Spool, 500ft.

## FEATURES

- Suitable for Direct Burial
- Durable Weather Resistant Jacket
- UV Rated Outer Jacket
- High-Strand Oxygen Free
- Bare Copper Conductors
- ETL Listed, RoHS Compliant

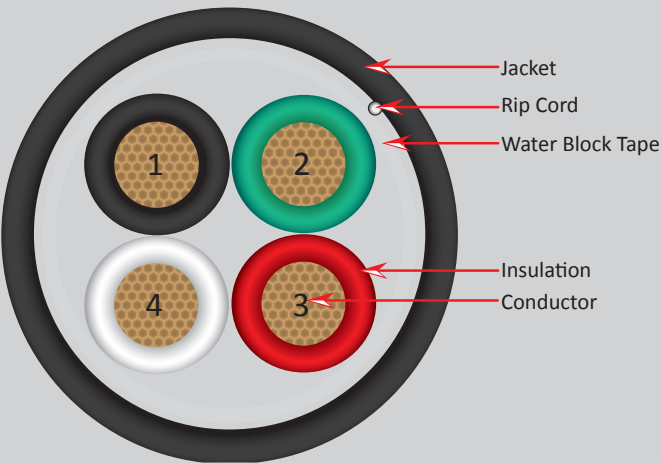

## SKU: 209-2321/DB

<b>Conductor</b>	<b>4 Core (Stranded BC)</b>
Material	Oxygen Free Copper Wire Strands
Size	14AWG
Stranding	105 Strands
Strand Diameter	0.16 mm
<b>Insulation</b>	
Material	SRPVC
Average Thickness	0.36 mm
Min. Point Thickness	0.33 mm
Diameter (±0.05mm)	2.60 mm
<b>Water Block Tape</b>	Yes
<b>Jacket</b>	
Material	PE (UV)
Color	Black
Average Thickness	0.95 mm
Min. Point Thickness	0.88 mm
Outer Diameter (±0.1mm)	8.20 mm
<b>Insulation Color</b>	Black, Red, Green, White
<b>Ripcord</b>	
Material	Nylon (150D)
<b>Electrical Performance</b>	
Rated Temperature	-20°C - 75°C
Rated Voltage	300V
Reference Standard	ETL Listed
<b>Mechanical Characteristics</b>	
Test Object	Jacket
Test Material	PE
Before Tensile Strength (Mpa)	>=13.8
Aging Elongation (%)	>=100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	>=85% of unaged
Aging Elongation (%)	>=50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

### Marking on Jacket

VERTICAL 4003289 cETLus AUDIO CABLE 14 AWG 4 COND 105 STRANDED OXYGEN FREE OUTDOOR UV DIRECT BURIAL RoHS XXXFT

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 09/2016

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.