

18AWG 2 CONDUCTOR STRANDED (16 STRAND)




DESCRIPTION

18AWG, 2 Conductor, Stranded (16 Strand), PVC Jacket, UV Rated Outer Jacket, Pull Box, 500ft.

FEATURES

- Suitable for Direct Burial
- Durable Weather Resistant Jacket
- UV Rated Outer Jacket
- High-Strand Oxygen Free
- Bare Copper Conductors
- ETL Listed, RoHS Compliant

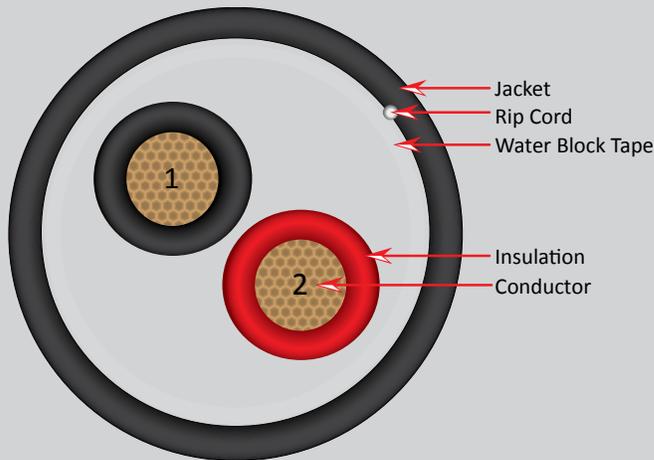

SKU: 209-2328/DB

Conductor	2 Core (Stranded BC)
Material	Oxygen Free Copper Wire Strands
Size	18 AWG
Stranding	16 Strand
Strand Diameter ($\pm 0.01\text{mm}$)	0.24 mm
Insulation	
Material	PVC
Color	Black, Red
Insulation Thickness (mm)	0.30
Outer Diameter ($\pm 0.01\text{mm}$)	1.75
Jacket	
Material	PE (UV)
Color	White
Jacket Thickness (mm)	0.50
Outer Diameter ($\pm 1.0\text{mm}$)	5.6
Insulation Color	Black, Red
Ripcord	Yes
Electrical Performance	
Rated Temperature	-15~70 Celsius
Conductor Resistance	$\leq 25.2 \text{ Ohms}/1000\text{m}$
Voltage Endurance	DC 300V/min
Jacket Print	
VERTICAL xxxxxx cETLus AUDIO CABLE 18AWG 2 COND	
16 STRANDED OXYGEN FREE OUTDOOR UV DIRECT BURIAL	
XXXFT	

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 09/2016

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.