

14AWG 4 CONDUCTOR STRANDED SHIELDED (105 STRAND)




DESCRIPTION

14AWG, 4 Conductor, Stranded Shielded (105 Strand), PVC Jacket, Pull Box, 500ft.

APPLICATION

- Intercom Systems
- Sound / Audio
- Indoor Applications

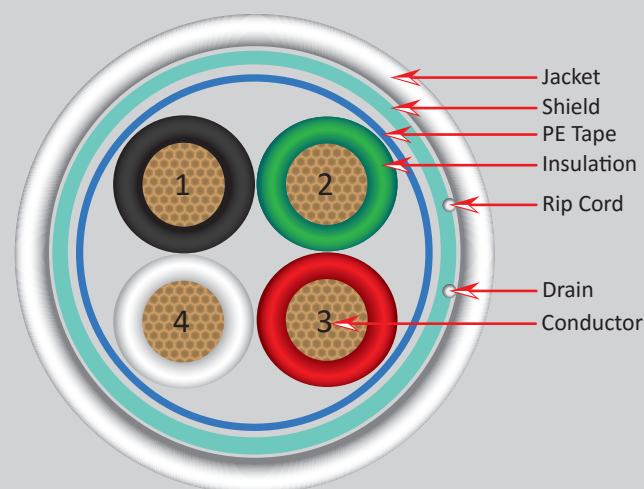

SKU: 209-2351/S/5WH

Conductor

4 Core (Stranded)

Material	Oxygen Free Copper Wire Strands
Size	14 AWG
Stranding	105 Strand
Strand Diameter	0.16 mm

Insulation

Material	PVC
Average Thickness	0.355 mm
Min. Point Thickness	0.33 mm
Insulation Diameter (±0.05mm)	2.60 mm

PE Tape

Drain wire(TC) Yes

AL Foil

Yes

PE Tape

Yes

Assembly Diameter (±0.1mm)

6.50 mm

Jacket

Material	PVC
Color	White
Average Thickness	0.80 mm
Min. Point Thickness	0.72 mm
Outer Diameter (±0.1mm)	8.20 mm

Insulation Color

Black, Red, Green, White

Ripcord

Material	Nylon (150D)
----------	--------------

Electrical Performance

Rated Temperature (°C)	70
Voltage Rating	30V
Reference Standard	ETL, CMR, CL3

Mechanical Characteristics

Test Object	Jacket
Test Material	PVC
Before: Tensile Strength (Mpa)	>=13.8
Aging: Elongation (%)	>=100
Aging Condition (°Cxhrs)	100x168
After: Tensile Strength (Mpa)	>=85% of unaged
Aging: Elongation (%)	>=50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

Marking on Jacket

VERTICAL 4001453 cETLus AUDIO CABLE 14 AWG 4 COND 105 STRANDED SHIELDED OXYGEN FREE CMR CL3R RoHS V1379P10238 XXXXFT

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 02/2015

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.