

14AWG 2 CONDUCTOR PLENUM RATED




DESCRIPTION

14/2 Stranded Bare Copper Conductors, Unshielded with an overall jacket. Plenum Rated, 1000ft, Pull Box

FEATURES

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Supplied in a 1000ft Pull Box

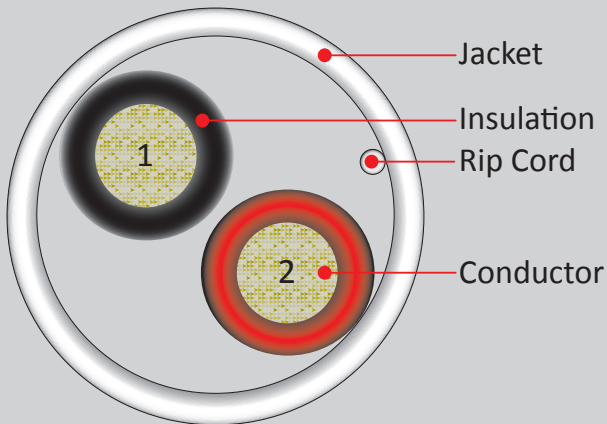

SKU: 211-142/P/WH

Conductor

| | |
|------------|---|
| Material | Bare Copper |
| Size | 14AWG |
| Stranding | 19 Strand (19x0.0142in., 19x0.361mm) |
| Conductors | 2 Conductor |

Insulation

| | |
|-----------|----------------------------|
| Material | PL-PVC |
| Thickness | 0.094 in. (2.38mm) Nominal |
| Colors | Black, Red |
| Ripcord | Yes |

Jacket

| | |
|------------------|-----------------------------|
| Material | PL-PVC |
| Thickness | 0.0173 in. (0.44mm) Nominal |
| Overall Diameter | 0.222 in. (5.64mm) Nominal |
| Color | White |

Electrical Properties

| | |
|---------------|---------------------|
| Temp. Rating | -20°C ~ +75°C |
| DCR Conductor | 8.6 Ohms/Km. @ 20°C |

Ratings/Approvals

NEC Article 800, UL Subject 444, CMP/CL2P (UL), RoHS Compliant

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 11/2014

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.