

# 14AWG 2 CONDUCTOR STRANDED CABLE




**SKU: 211-142ST/5WH**

## DESCRIPTION

14/2 Stranded Bare Copper Conductors,  
Unshielded, CM/CL2 Rated, 500ft.

## FEATURES

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- 500ft Pull Box

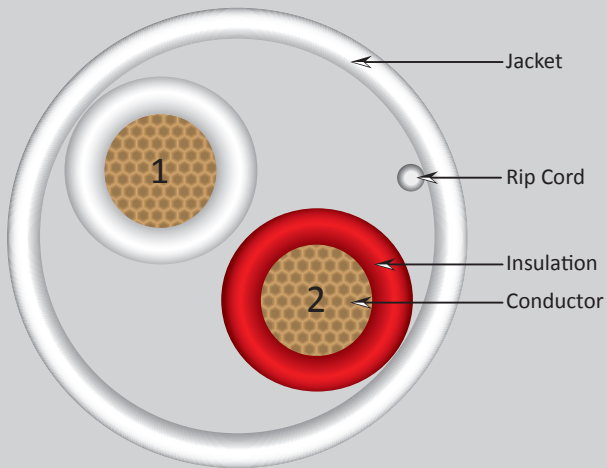

### Conductor

Material	Stranded Bare Copper
Size	14AWG
Stranding	19 Strand
Diameter (mm)( $\pm 0.01$ )	19x0.37
Conductors	2

### Insulation

Material	PVC
Overall Diameter (mm)( $\pm 0.05$ )	2.8
Nominal Wall (mm)	0.46
Colors	Black, Red
Ripcord	Yes

### Jacket

Material	PL-PVC
Min Thickness (mm)	0.50
Overall Diameter (mm)( $\pm 0.6$ )	7.0
Color	White

### Electrical Properties

Temperature Rating ( $^{\circ}\text{C}$ )	20
DCR Conductor ( $\Omega/\text{Km}$ )	$\leq 9.5$
Insulation Resistance ( $\text{M}\Omega/\text{Km}$ )	$\geq 50$ (1Min at DC500V)
Voltage Endurance (V/min)	DC 150 (CL2)

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 10/2014

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.