

# 14AWG 4 CONDUCTOR PLENUM RATED (CMP)



**SKU:211-144/P/5WH**  
**211-144/P/WH**

## DESCRIPTION

14/4 Stranded Bare Copper Conductors, Unshielded with an overall jacket. Plenum Rated, 500ft or 1000ft, Pull Box

## APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications

### Conductor

Material	Bare Copper
Size	14AWG
Stranding	7 Strand
Conductors	4 Conductor

### Insulation

Material	Plenum Polymer
Thickness	0.009 in. (0.228mm) Nominal
Colors	Black, Red, White, Green

### Jacket


Material	Plenum Polymer
Thickness	0.015 in. (0.381mm) Nominal
Overall Diameter	0.247 in. (6.273mm) Nominal
Color	White

### Electrical & Physical Properties

Voltage	150V RMS
DC Resistance per Conductor	@ 20°C 2.6Ω/1m'
Maximum pulling tension	168lbs
Min. Bend Radius	2.6 in

### Ratings/Approvals

NEC Article 725, UL Subject 13, Type CL2P FT6, c(ETL)US or c(UL)us, RoHS Compliant

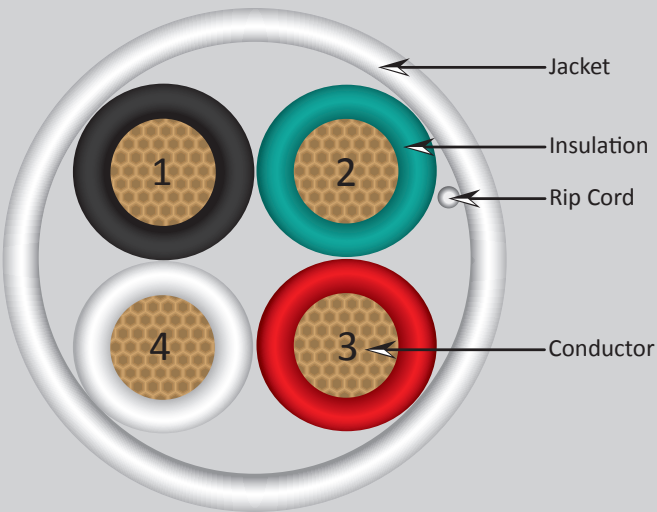

# MADE IN USA

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 11/2014

Specs subject to change without notice.  
It is the sole responsibility of the user to have the most current specs.