

14AWG 4 CONDUCTOR STRANDED CABLE




DESCRIPTION

14/4 Stranded Bare Copper Conductors,
Unshielded, CM/CL2 Rated, 1000ft.

FEATURES

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- 1000ft Pull Box

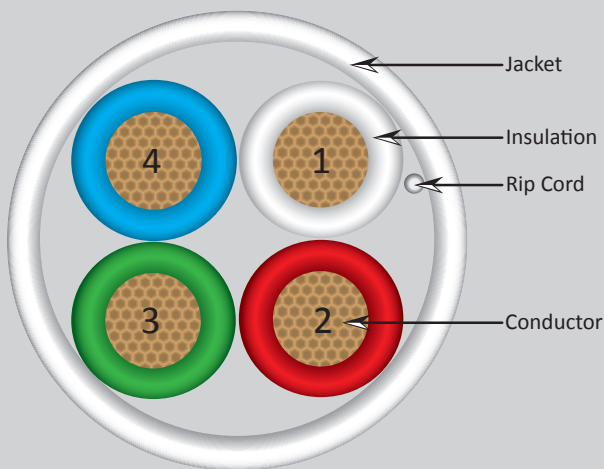

SKU: 211-144ST/WH

Conductor

Material	Stranded Bare Copper
Size	14AWG
Stranding	19 Strand
Diameter (mm)(± 0.01)	19x0.37
Conductors	4

Insulation

Material	PVC
Overall Diameter (mm)(± 0.05)	2.8
Nominal Wall (mm)	0.46
Colors	White, Red, Green, Blue
Ripcord	Yes

Jacket

Material	PL-PVC
Min Thickness (mm)	0.50
Overall Diameter (mm)(± 0.6)	8.3
Color	White

Electrical Properties

Temperature Rating ($^{\circ}\text{C}$)	20
DCR Conductor (Ω/Km)	≤ 9.5
Insulation Resistance ($\text{M}\Omega\text{Km}$)	≥ 50 (1Min at DC500V)
Voltage Endurance (V/min)	DC 150 (CL2)

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 10/2016

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.