

16AWG 4 CONDUCTOR PLENUM RATED




DESCRIPTION

16/4 Stranded Bare Copper Conductors, Unshielded with an overall jacket. 500ft or 1000ft, Pull Box

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications

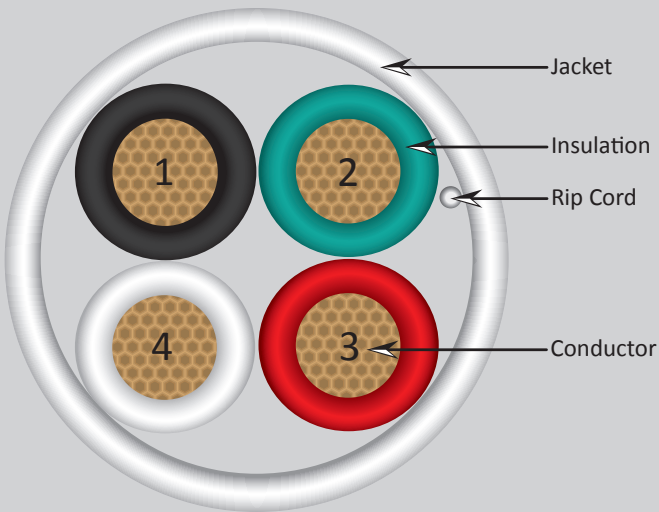

SKU: 211-164/P/5WH

SKU: 211-164/P/WH

Conductor

Material	Bare Copper
Size	16AWG
Stranding	19 Strand
Diameter (mm)	19x0.287
Conductors	4 Conductor

Insulation

Material	PL-PVC
Diameter (± 0.1 mm)	2.0
Colors	Black, Red, White, Green

Jacket

Material	PL-PVC
Thickness (mm)	0.46
Min. Thickness (mm)	0.36
Overall Diameter (± 0.15 mm)	5.7
Color	White
Rip Cord	DuPont Kevlar

Electrical & Physical Properties

Operating Temp	-20°C to +75°C
Voltage	300V RMS
DC Resistance per Conductor @ 20°C	4.19 Ω /1000ft
Maximum Pulling Tension	108lbs
Maximum Bend Radius (Installation)	2.1 inches

Ratings/Approvals

NEC Article 800, Type CMP
c(ETL)US or c(UL)us, RoHS Compliant

Jacket Print

16AWG*4C 75C E329281 CMP (UL) C(UL) MM/DD/YYYY RoHS
COMPLIANT ****FT
Sequential foot markings.

MADE IN USA

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 04/2015

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.