

# 18AWG 4 CONDUCTOR PLENUM RATED (CMP)



## DESCRIPTION

**18/4 Stranded Bare Copper Conductors, Unshielded with an overall jacket. (CMP) Plenum Rated, 500ft Pull Box**

## APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications

**SKU: 211-184/P/5WH**

### Conductor

|            |             |
|------------|-------------|
| Material   | Bare Copper |
| Size       | 18AWG       |
| Stranding  | 7 Strand    |
| Conductors | 4 Conductor |

### Insulation

|           |                               |
|-----------|-------------------------------|
| Material  | Low Smoke Flame Retardant PVC |
| Thickness | 0.009 in. (0.228mm) Nominal   |
| Colors    | Black, Red, White, Green      |

### Jacket


|                  |                               |
|------------------|-------------------------------|
| Material         | Low Smoke Flame Retardant PVC |
| Thickness        | 0.015in (0.381mm) Nominal     |
| Overall Diameter | 0.184in (4.673mm) Nominal     |
| Color            | White                         |

### Electrical & Physical Properties

|                                    |              |
|------------------------------------|--------------|
| Voltage                            | 300V RMS     |
| DC Resistance per Conductor @ 20°C | 6.92Ω/1000ft |
| Nominal Capacitance:               | 29.4pf/ft    |
| Nominal Impedance :                | 73Ω          |
| Nominal Velocity of Propagation:   | 55%          |

### Ratings/Approvals

NEC Article 800, Type CMP  
c(ETL)US or c(UL)us, RoHS Compliant  
UL Subject 444

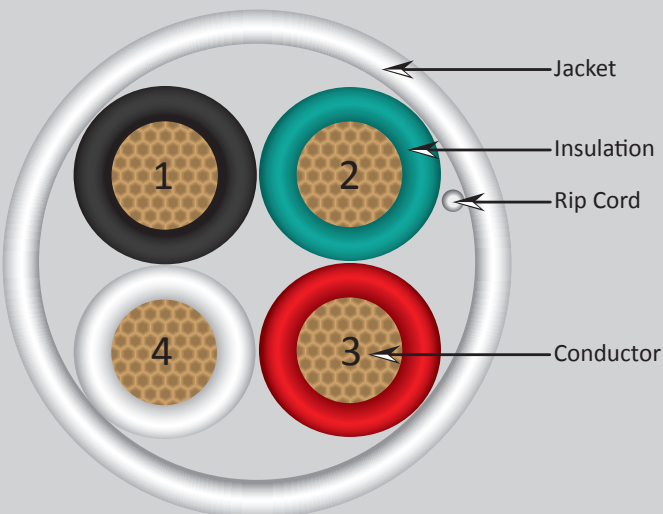

# MADE IN USA

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 11/2014

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.