

FIBER OPTIC PATCH CORD

Singlemode Duplex




DESCRIPTION

Singlemode Duplex Fiber Optic Patch Cord, LC, SC or ST Connectors, UPC Polish, UL

FEATURES

- Singlemode Duplex Fiber Optic Patch Cord
- LC-LC, LC-SC, LC-ST, SC-ST, ST-ST connector configurations available
- 1m/2m/3m/5m/7m/10m/15m lengths available
- Available in standard or custom configurations
- 3.0mm diameter
- Low back reflection and insertion loss
- PVC jacket
- Ceramic ferrule
- UL, RoHS Compliant

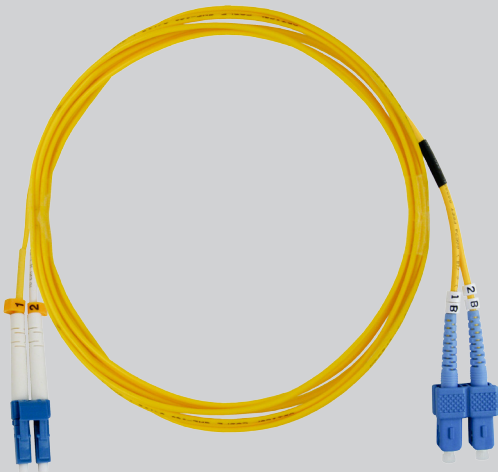

SKU: 261 Series

Technical Data

Fiber Type	9/125 μ m
Polish	UPC
Buffer	Kevlar
Overall Diameter	900 μ m
Jacket	PVC (OFNR-Rated)
Overall Diameter	3.0mm

Mechanical Characteristics

Attenuation @ 850nm(dB/km)	-
Attenuation @ 1310nm(dB/km)	-
Typical Insertion Loss	\leq 0.15dB
Max Insertion Loss	\leq 0.30dB
Max Return Loss	\leq 0.50dB
Min Bandwidth @ 850nm(kHz/km)	-
Min Bandwidth @ 1310nm(kHz/km)	-
Maximum Tensile Load	100N/cm

Jacket Print

OPTICAL CABLE SMF-28e 9/125 2.0x4.1 OFNR RoHS UL
(Cord Length Label attached)

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 9/2014

Subject to change without notice