

BUNDLED CABLE (CMR)

2 CAT5E + 2 RG6 QUAD + 2 FIBER



SKU: 294-2174

TECHNICAL SPECS

Rated Temperature (°C)	75
Flammability Test	CMR
CAT5E UTP Cable	
Conductor	24AWG Solid Bare Copper
Insulation	PE
Insulation Diameter (±0.02mm)	0.91
Twisted Pair Diameter (±0.02mm)	1.82
Jacket	PVC
Outer Diameter (±0.2mm)	5.10
Rip Cord	Yes
Color	Blue and Gray (CAT5E Jacket)
RG6 Quad Shield	
Conductor	18AWG Copper Clad Steel
Conductor Diameter	1.02
Insulation	Foam PE
Bonded AL-Foil	Yes
Braiding-1	16/5/0.12 AL-Wire (60%)
AL-Foil (Double)	Yes
Braiding-2	16/3/0.12 AL-Wire (40%)
Jacket	PVC
Outer Diameter (±0.15mm)	7.4
Color	Black and White (Coaxial Jacket)
Fiber (Multimode)	
2 cores	Ultra Pure Silica Glass
Core Diameter (±3µm)	62.5
Clad Diameter (±2µm)	12.5
Primary Coating Material	UV Curable Acrylate
Jacket	PVC
Color	Red & Orange (Fiber Jacket)
Assembly (2CAT5E + 2 RG6 + 2FIBER)	
Jacket	PVC
Jacket Diameter (±0.3mm)	17.50
Color	White

DESCRIPTION

Bundled Cable, 1 x CAT5E UTP with 1 x RG6 (CCS) Quad Shield + Multimode Fiber connected siamese style, 500ft Spool

FEATURES

- High-Performance Data Cable
- Suitable for 350MHz High Speed Data Applications, Gigabit Ethernet, Fast Ethernet and 15Mbps TP-PMD/ CDDI
- Designed For Indoor Installations
- CMR Rated
- ETL Verified, RoHS Compliant
- ANSI/TIA/EIA 568C.2, ISO/IEC-11801
- Supplied in 500ft Wooden Spool

CAT5E UTP Cable


- 4-Pair - Easily identified color-striped pairs
- 24AWG Solid Bare Copper Conductors

RG6 Coaxial Cable

- High-Grade RG6 Quad Shield
- Suitable for Digital HDTV Applications, CATV, Outdoor TV Antennas and Digital Satellite Installations
- 18AWG Solid Copper Clad Steel
- Suitable for Digital HDTV, CATV
- Sweep-Tested to 3GHz

Multimode Fiber

- 2 Cores

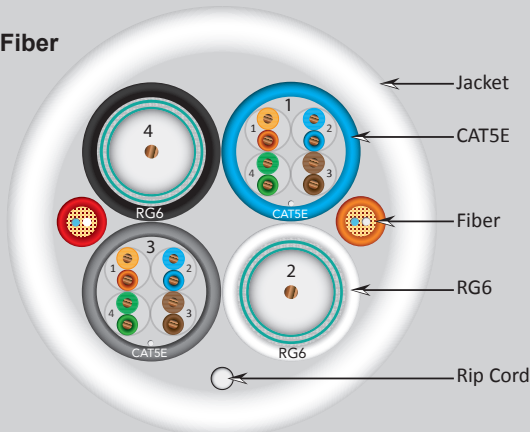

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



Continued on Page 2

www.verticalcable.com
Rev. 05/2015

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.

BUNDLED CABLE (CMR) 2 CAT6 UTP + 2 RG6 QUAD

PERFORMANCE

Continued from Page 1

Marking on Outer Jacket

VERTICAL CMR 75C 2 x (24AWG/4P) CAT5E 350MHZ UTP AND 2 x (18AWG) RG6/U QUAD AND 2 x (OPTICAL FIBER) XXXFT

Marking on RG6 Jacket

RG6/U QUAD TYPE CMR 18AWG CATV SWEPT TO 3000MHZ XXXFT

Marking on CAT5E Jacket

VERIFIED CMR CATEGORY 5E 350MHZ TIA/EIA-668C.2 24AWG 4PR UTP XXXFT

Marking on Fiber

OPTICAL FIBER CABLE MULTIPLE DUPLEX 62.5/125

Mechanical Characteristics:

Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	≥13.8
aging Elongation (%)	≥100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	≥85% of unaged
aging Elongation (%)	≥50% of unaged
Cold Bend (-20±2°Cx4hrs)	No Crack

CAT5E Electrical Characteristics:

1.0-350MHz Impedance (Ω)	100±15
1.0350MHz Delay Skew (ns/100m)	≤45
Capacitance Unbalance (pF/100m)	≤330
Conductor D.C.R. (Ω-km)	93.8
D.C.R. Unbalance	≤5%

Frequency	Return Loss	Attenuation	PS-NEXT	NEXT	FLFEXT	PS-FLFEXT
MHz	dB	dB(100m)	dB	dB	dB	dB
	Minimum	Maximum	Minimum	Minimum	Minimum	Minimum
0.772	19.4	2.2	64.0	67.0	66.0	63.0
1	20.0	2.4	62.3	65.3	63.8	60.8
4	23.0	4.9	53.3	56.3	51.7	48.7
8	24.5	6.9	48.8	51.8	45.7	42.7
10	25.0	7.8	47.3	50.3	43.8	40.8
16	25.0	9.9	44.3	47.3	39.7	36.7
20	25.0	11.1	42.8	45.8	37.7	34.7
25	24.3	12.5	41.3	44.3	35.8	32.8
31.25	23.1	14.1	39.9	42.9	33.9	30.9
62.5	21.5	20.4	35.4	38.4	27.8	24.8
100	20.1	26.4	32.3	35.3	23.8	20.8
250	17.8	34.5	26.3	29.3	15.8	12.8
350	16.6	40.2	24.2	27.2	12.9	9.9

RG6 Quad Electrical Characteristics:

Impedance (±5.0Ω)	75.0
Nominal Attenuation per 100ft	
1MHz	0.25dB
50MHz	1.41dB
100MHz	1.92dB
200MHz	2.64dB
700MHz	5.06dB
1000MHz	6.2dB
1800MHz	8.43dB
2200MHz	9.35dB

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 05/2015

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.