

# V-MAX CAT6A DATA JACK SHIELDED 90° DEGREE STYLE




## DESCRIPTION

Category 6A Shielded Data Grade Keystone Jack 90° Degree 8x8 Conductors.

## FEATURES

- Krone Type IDC (Terminal Block)
- 360° Shielding Structure to prevent EMI
- TIA/EIA-568B.2-10, IEEE802.3an
- ISO/IEC11801, EN50173-1 Class EA Specification
- Comply with CISPR/FCC Class A
- 3P Verified for 10G Cat6A
- Flame retardant rating: UL 94V-0
- ETL Listed, UL Listed, RoHS Compliant

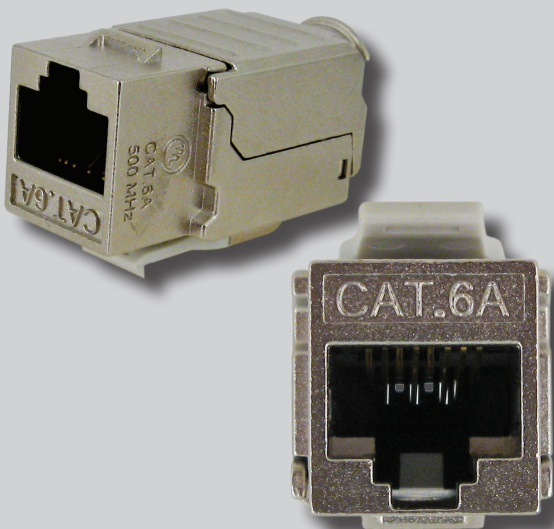

## SKU: 303-SERIES

### Physical Specifications

Dimension (mm)	19H x 21W x 38.1D
<b>Housing Material</b>	
Housing & Cap	Polycarbonate
<b>Contact Material</b>	
IDC 110 Contacts	100μ Inch nickel plated over phosphor bronze
IDC Operating Life	Minimum 250 re-terminations
Jack Contact	Phosphor bronze, 50μ inch gold plating over nickel
Jack Operating Life	Minimum 750 insertions
Compatibility	23 to 26 AWG (solid)
Shielded Cover	50~60μ inch nickel plated over phosphor bronze

### Product Qualifications

ANSI/TIA-568-C.2  
ETL Listed

### Electrical:

Dielectric strength	1000V RMS for 1min
Insulation resistance	10mΩ min
Contact Resistance	2mΩ per contact
Current Rating	1.5Amp Max
Humidity	10%~65%

**VERTICAL CABLE**

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 10/2015

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.