

# 22AWG 2 CONDUCTOR SHIELDED PLENUM RATED




## DESCRIPTION

22/2 Stranded Bare Copper Conductors, Shielded with an overall jacket. Plenum Rated, 1000ft Pull Box

## FEATURES

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Supplied in a 1000ft Pull Box

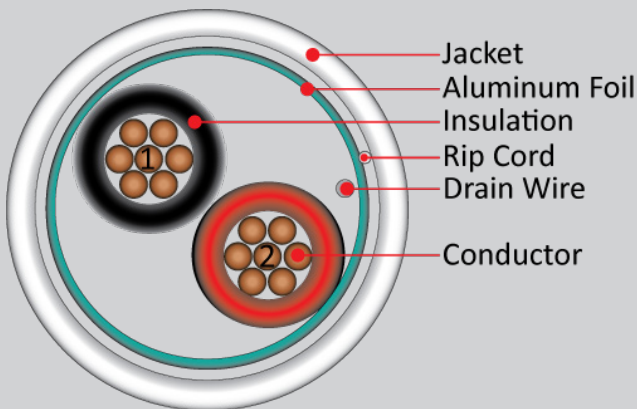

**SKU: 210-222/S/P/WH**

### Conductor

Material	Bare Copper
Size	22AWG
Stranding	7 Strand (7x0.01in., 7x0.254mm)
Conductors	2 Conductor

### Shielding

Drain Wire	Aluminum Foil 24AWG Strand Tinned Copper
------------	--

### Insulation

Material	PL-PVC
Thickness	0.044 in. (1.12mm) Nominal
Colors	Black, Red
Ripcord	Yes

### Jacket

Material	PL-PVC
Thickness	0.0205 in. (0.52mm) Nominal
Overall Diameter	0.132 in. (3.35mm) Nominal
Color	White

### Electrical Properties

Temp. Rating	-20°C ~ +75°C
DCR Conductor	55.4 Ohms/Km. @ 20°C
DCR Drain Wire	90.9 Ohms/Km. @ 20°C

### Ratings/Approvals

NEC Article 800, UL Subject 444, CMP/CL2P (UL), RoHS Compliant

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 11/2014

Specs subject to change without notice.  
It is the sole responsibility of the user to have the most current specs.