

22AWG 6 CONDUCTOR STRANDED, SHIELDED



SKU: 210-226ST/S

TECHNICAL SPECS

Rated Temperature (°C)	75
Rated Voltage	300
Product Standard Certification	
Flammability Test	

Conductor

Material	Stranded Bare Copper
Size	22AWG
Diameter (±0.005mm)	7 Strand (7x0.24mm)
Conductors	6 Conductors

Insulation

Material	PVC
Average Thickness	0.190mm
Min Point Thickness	0.170mm
Insulation Diameter (±0.05mm)	1.10
Colors	Red, Blue, Green Yellow, Gray, Black

Jacket

Material	PVC
Average Thickness	0.50mm
Min Point Thickness	0.45mm
Outer Diameter (±0.1mm)	4.80
Rip Cord	Yes
PE Tape	Yes
Drain Wire (TC)	7/0.20
Al Foil	Yes
Color	Gray White
Assembly Diameter (±0.1mm)	3.30

Mechanical Characteristics

Test Object	Jacket
Test Material	PVC
Aging Condition (°Cxhrs)	100x168
Tensile Strength (Mpa)	
Before	≥13.8
After	≥85% of unaged
Elongation (%)	
Before	≥100
After	≥50% of unaged

Marking


XXX

DESCRIPTION

Alarm-Security Cable, Shielded, 22AWG, 6 Conductor, Stranded, 1000ft, Pull Box

FEATURES

- Ideal for Indoor Remote Control of Security, Intercom, and Sound Systems
- Can also be used for Powering Limited-Control Circuits or Burglar Alarms
- Door Controllers, Prox Sensors, Key Pads, Sound Systems, Access Control, Smoke Detectors
- PVC Outer Jacket
- Comes in a 1000ft Pull Box

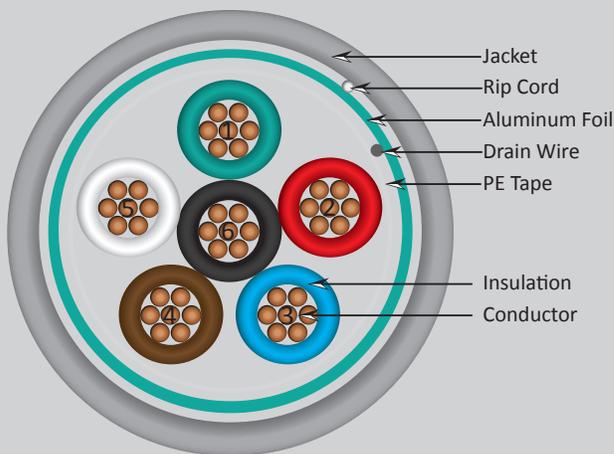

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 2/2017

Subject to change without notice