

FIBER OPTIC PATCH CORD

OM3 Multimode Duplex (Aqua)



SKU: 263-SCSC

DESCRIPTION

OM3 Multimode Duplex Fiber Optic Patch Cord.

FEATURES



- OM3 Multimode Duplex
- GR-326-Core
- RoHS Compliant
- Performance according to IEC
- Meets Telcordia Standards
- SC-SC connector
- 1m/2m/3m/5m/7m/10m/15m lengths available

Technical Data

| | |
|-------------------------------|---------------------|
| Fiber Type | 50/125 μ m |
| Polish | PC |
| Jacket | PVC (OFNR) |
| Overall Diameter | 2.0mm |
| Optical Specifications | |
| Typical Insertion Loss | ≤ 0.20 dB |
| Max Insertion Loss | ≤ 0.25 dB |
| Durability (500 Mating Times) | I.L. ≤ 0.25 db |
| Tensile Load | 7.0 kg |
| Bend Radius | 3.8cm |
| Operating Temperature | -20°C ~ +75°C |
| Storage Temperature | -20°C ~ +85°C |

Jacket Print

OPTICAL CABLE OM3 50/125 MM-2.0x4.1 OFNR

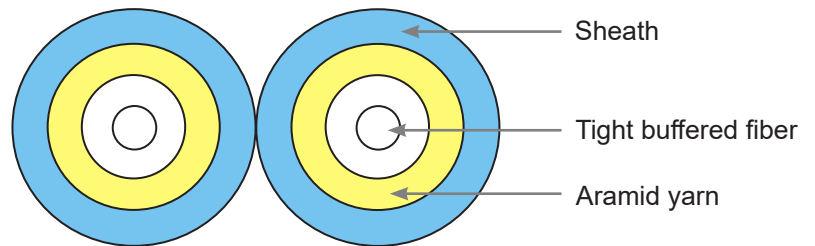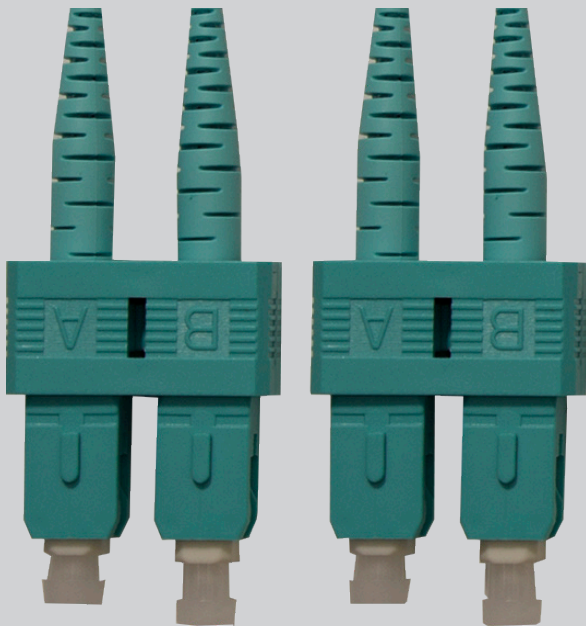

OM3 Cable

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 07/2016

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.