

CAT6 DATA JACK

90° DEGREE STYLE (SHIELDED)




DESCRIPTION

Category 6 Shielded Data Grade Keystone Jack 90° Degree 8x8 Conductors.

FEATURES

- 360° Shielding Structure to prevent EMI
- 110-IDC Contacts (Terminal Block)
- Color Coded for 568A and 568B
- EIA/TIA 568A/B standards
- ANSI/TIA-568-C.2 , ISO/IEC11801, EN50173-1
- Thermoplastic ABS Housing
- RoHS Compliant

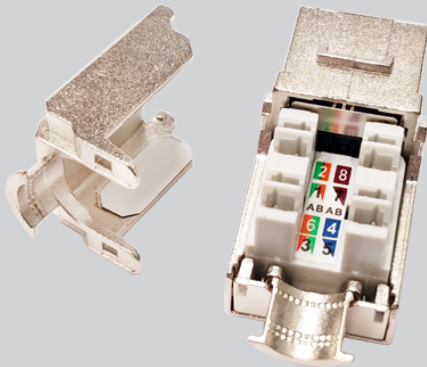

SKU: 302-J2631/S

Physical Specifications

Dimension (mm) 19.35H x 21W x 46.83D

Housing Material

Housing & Cap Polycarbonate

Contact Material

IDC 110 Contacts 100μ Inch nickel plated over phosphor bronze
 IDC Operating Life Minimum 250 re-terminations
 Jack Contact Phosphor bronze, 50μ inch gold plating over nickel
 Jack Operating Life Minimum 750 insertions
 Compatibility 23 to 26 AWG (solid)

Shielded Cover


50~60μ inch nickel plated over phosphor bronze

Product Qualifications

ANSI/TIA-568-C.2
 ETL Listed

Electrical:

Dielectric strength 1000V RMS for 1min
 Insulation resistance 10mΩ min
 Contact Resistance 2mΩ per contact
 Temperature Range -10°C to 60°C max
 Humidity 10%~65%

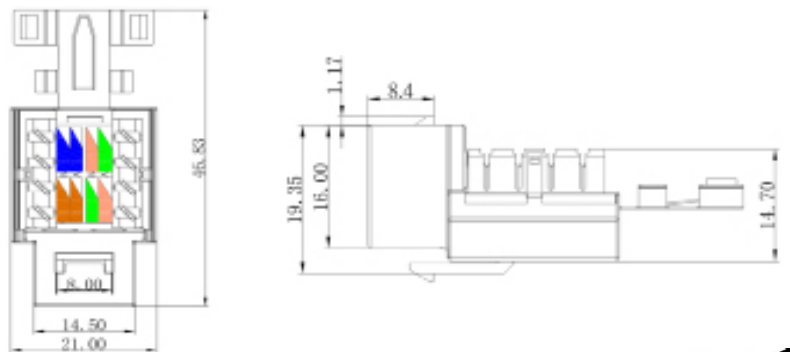

VERTICAL CABLE

954 454-3554 Florida Office
 951 696-7772 California Office



www.verticalcable.com

Rev. 10/2017
 Subject to change without notice.