

CONTROL CABLE

22AWG 2 CONDUCTOR (Shielded) + 18AWG 2 CONDUCTOR




DESCRIPTION

22/2 Shielded + 18/2 Stranded Bare Copper Conductors, with an overall jacket. ETL CL3 rated.

APPLICATION

- Touch Panels, Key Pads
- Expansion Modules, Tuners
- Indoor Applications
- Power Limited Control Circuits

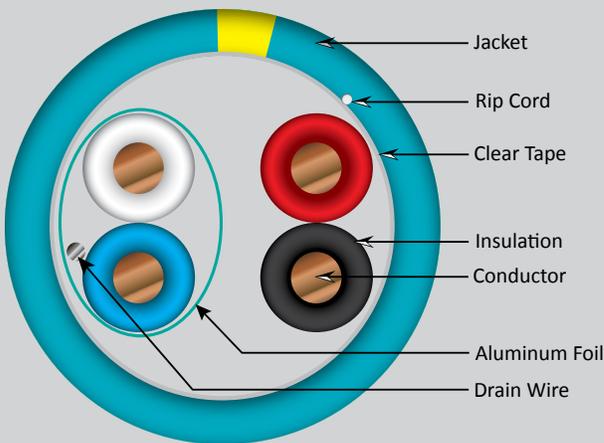

SKU: 214-2321/TL

22AWG

Conductors (Stranded)	2 (7 Strand)
Material	Bare Copper
Insulation Material	Foamed PE
Insulation Thickness	0.025 in. Nominal
Insulation Colors	Blue, White
Shield	Aluminum Foil
Drain Wire (Stranded)	Tinned Copper

18AWG

Conductors (Stranded)	2 (16 Strand)
Material	Bare Copper
Insulation Material	High Density PE
Insulation Thickness	0.010 in. Nominal
Insulation Colors	Red, Black
Shield	None

Outer Jacket

Material	PVC
Thickness	0.032 in. Nominal
Diameter	0.245 in. Nominal
Color	Teal / Yellow Stripe

Rated Voltage	300V, RMS
Rated Temperature	-20°C - 75°C

Ratings/Approvals
 NEC Article 800, UL Subject 444, Type CM
 C(ETL)US, Rohs Compliant

Available in a 1000ft Wooden Spool



VERTICAL CABLE

951.696.7772 California
 800.749.2447 Florida
 845.391.8318 New York

www.verticalcable.com

Rev. 12/2014

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.