

# 16AWG 4 CONDUCTOR PLENUM RATED




## DESCRIPTION

16/4 Plenum, Shielded, Stranded, Bare Copper Conductors, White, 500ft or 1000ft, Pull Box

## APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications

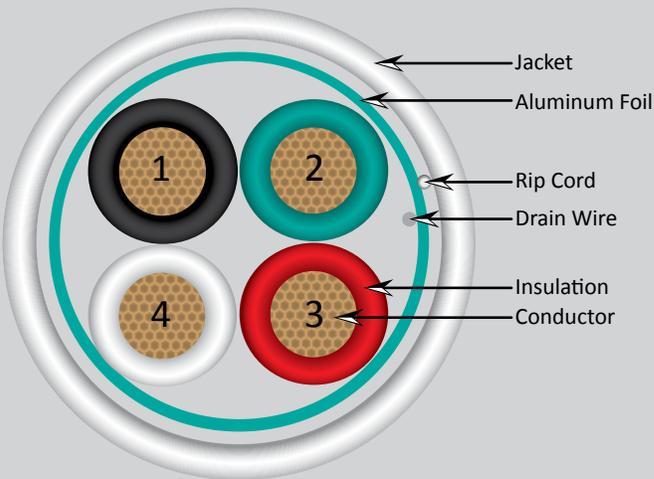

**SKU: 211-164/S/P/5WH**

**SKU: 211-164/S/P/WH**

### Conductor

Material	Bare Copper
Size	16AWG
Stranding	19 Strand
Conductors	4 Conductor

### Insulation

Material	Low Smoke Flame Retardant Plenum Polymer
Thickness	0.007 in (0.177mm) Nominal Colors Black, White, Red, Green

### Shield

Material	Aluminum/Polyester Tape
Drain	Stranded Tin Copper

### Jacket

Material	Low Smoke Flame Retardant Plenum Polymer
Thickness	0.015in (0.381mm) Nominal
Overall Diameter	0.207in (5.257mm) Nominal
Color	White

### Electrical & Physical Properties

Voltage	300V RMS
DC Resistance per Conductor @ 20°C	4.2Ω/1m'
Temperature Rating	-2°C to 60°C

### Ratings/Approvals

NEC Article 760, Type FPLP  
c(ETL)US or c(UL)us, RoHS Compliant

# MADE IN USA

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 12/2017

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.