

16AWG 2 CONDUCTOR FIRE ALARM CABLE (FPLR-RISER) UNSHIELDED




DESCRIPTION

Fire Alarm Cable, 16/2, Solid, Unshielded, FPLR (Riser), 1000ft Spool

FEATURES

- Fire Alarm Cable
- FPLR (Power-Limited Fire Alarm Riser Cable)
- Fire protective signal circuit
- Applications: Smoke alarms and detectors, pull boxes, burglar alarms, addressable fire alarm systems
- 16AWG 2 Conductor
- 100% Solid Bare Copper Conductors
- Unshielded
- MADE IN USA
- ETL Listed, RoHS Compliant
- Spool Dimensions: 12'H x 12'D
- 1000ft Spool

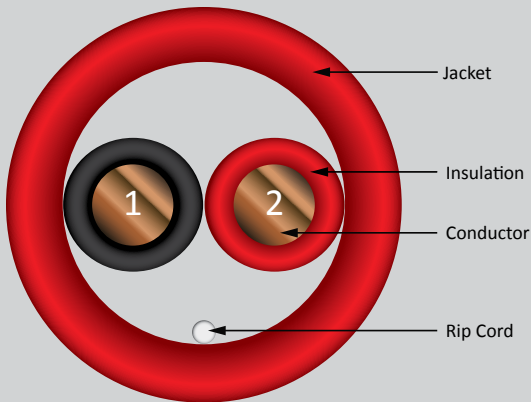

SKU: 315-162/R Series

Conductor

Material 16AWG Solid Bare Copper
Conductors 2 Conductor

Insulation

Thickness (mm) PVC 0.229
Colors Red, Black

Rip Cord Shield Drain

Polyester Rip Cord
None
None

Jacket

Thickness (mm) Polyvinyl Chloride (PVC) 0.381
Overall Diameter (mm) 3.94
Color Red

Electrical & Physical Properties

Operating Temperature Rating (°C) -20 - 60
Operating Voltage Rating (V RMS) 300
Resistance @20°C (Ω/1000ft) 4.1
Weight (lb/1000ft) 23

Ratings/Approvals

NEC Article 760, NFPA 262 Steiner Tunnel Smoke and Flame Test, UL 1424, ETL Listed, RoHS Compliant
Does not comply with NYC LL5 (Local Law 5)

Jacket Print

16 AWG 2C RISER FIRE ALARM CABLE (ETL) US TYPE FPLR FILE NUMBER MADE IN USA

Colors Available

Red, Blue, Yellow



VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York

www.verticalcable.com

Rev. 10/2014

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.