

RG6 STANDARD SHIELD COAXIAL CABLE (CMR Rated)




DESCRIPTION

RG6 Standard Shield, 18AWG CCS Conductor, Aluminum Foil Shield & Aluminum Braid.

FEATURES

- High-Grade RG6 Dual Shield
- Sweep Tested to 3GHz
- CMR (Riser), CL2 Rated
- ETL, RoHS Compliant
- Suitable for Digital HDTV applications, CATV, TV antennas and Satellite TV

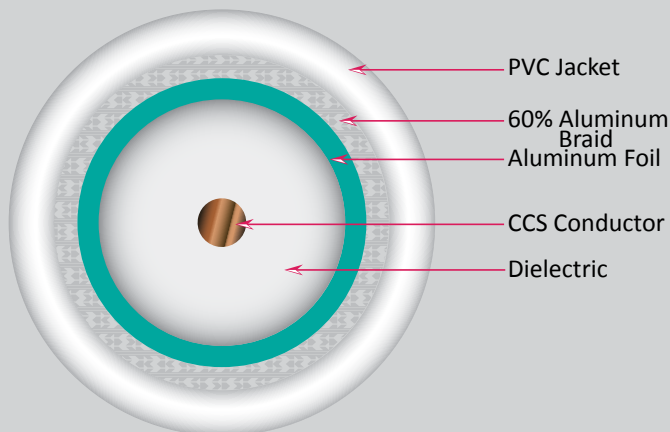

SKU: 107-1957WH6SR

Physical Characteristics

Conductor

Conductor Material	Copper Clad Steel (Solid)
Size	18 AWG
Construction	1.02±0.01 mm

Insulation

Material	Foamed PE
Diameter	4.57±0.01mm
Color	White

First Shield

Material	Aluminum Foil Bonded 100% Coverage
----------	---------------------------------------

Second Shield

Material	Aluminum Alloy Braid
Construction	5x16x0.12mm 60% Coverage

Jacket

Material	PVC (CMR)
Diameter	6.9±0.20mm
Color	Black

Electrical Specifications

Spark Test	3000VAC
Impedance	75±3 Ohms
Capacitance	54±3.0 pF/m
Velocity of Propagation	≥82%
SRL:	5-1000MHz ≥25dB 1001-3000MHz ≥20dB

Mechanical Specifications

Operating Temperature	-30°C ~ 75°C
Bending Radius	65mm

Jacket Print

c(ETL)us 4009326 CM RG6 18AWG 60% 3.0GHz CMG FT4
CATV/CL2 RoHS XXXFT

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 1/2018

Subject to change without notice

RG6 STANDARD SHIELD COAXIAL CABLE (CM Rated)

PERFORMANCE

Attenuation @ 68°F (20°C)		
Frequency (MHz)	dB/100 feet	dB/100 meters
5	0.58	1.90
55	1.60	5.25
211	2.87	9.43
250	3.12	10.24
270	3.24	10.63
300	3.43	11.25
330	3.61	11.84
350	3.72	12.20
400	4.00	13.12
450	4.28	14.04
500	4.51	14.80
550	4.26	15.62
600	4.98	16.34
750	5.62	18.44
870	6.09	19.99
950	6.50	21.33
1000	6.54	21.46
1450	8.00	26.25
1750	8.74	28.67
2050	9.46	31.04
2250	10.00	32.81
3000	11.40	37.38

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 1/2018

Subject to change without notice