

CAT5E SHIELDED CABLE STRANDED CONDUCTOR




SKU: 057-483/S/ST/BL
057-484/S/ST/GY
057-485/S/ST/WH

DESCRIPTION

Category-5E, 26AWG, STP w/Drain Wire, 8-Conductor, Stranded-Bare Copper.

FEATURES

- Category-5E Shielded Twisted Pair
- High-Performance Data Cable
- Easily Identified Color-Striped Pairs
- 26AWG Stranded Copper Conductors
- Exceeds TIA/EIA 568-C.2 Standards
- ETL Listed, RoHS Compliant
- 1000ft Pull Box

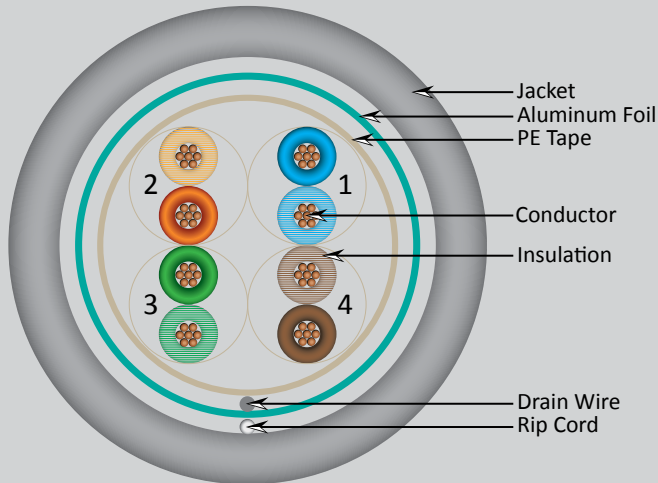

Technical Data

Rated Voltage	30v
Conductor	Stranded Bare Copper
Size	26AWG
Strands (mm)	7X 0.16
Insulation	HDPE
Insulation Diameter (±0.05mm)	0.96
Nominal Wall Thickness (mm)	0.18
Twisted Pair Diameter	1.92
Average Lay Length (mm)	≤30
PE-Tape	Yes
Drain Wire (mm)	1/0.5 CCS
AL-Foil	Yes
Jacket	PVC
Nominal Wall Thickness (mm)	0.5
Outer Diameter (±0.5mm)	6.0
Rip Cord	Yes (Nylon)
Color of Pairs	Pair 1:Blue,White-Blue Pair 2:Orange,White-Orange Pair 3:Green,White-Green Pair 4:Brown,White-Brown

Marking on Jacket

VERTICAL 4003289 ETL VERIFIED CAT5E SHIELDED STRANDED TO TIA/EIA 568-C.2 CM 26 AWG STP C(ETL)US ROHS XXXFT

Electrical Characteristics:

Conductor Resistance (Ω/100m)	≤14.5
Core-Core Resistance Unbalance (%)	≤5.0
Insulation Resistance (ΩKm(DC500V Charge 1 Min))	≥5000

Jacket color available in
Blue, White, Gray

VERTICAL CABLE

800.749.2447 Florida
 951.696.7772 California
 845.391.8318 New York



www.verticalcable.com

Rev. 04/2015

Specs subject to change without notice.
 It is the sole responsibility of the user to have the most current specs.