

# 18AWG 6 CONDUCTOR PLENUM RATED (SHIELDED)



**SKU: 211-186/S/P/WH**

COLOR CODE: Black, Red, White, Green, Brown, Blue

SHIELD/DRAIN: Aluminum/Polyester foil (out); 24AWG 7 Strand TC drain

ASSEMBLY: 6 conductors twisted, shielded and jacketed

JACKET: LS-PVC white (.014 Nom Wall)

DIAMETER: 0.225" Nominal

CABLE WT: 52 Lbs/1000 Ft Approx (Net Weight)

NEC: CMP/CL3P/FPLP

COMPLIANCE: UL 444 CMP by (UL) / NEC ARTICLE 800 / CSA C22.2 by c(UL) / RoHS

FLAME TEST: NFPA 262(UL 910) / CSA FT6

CAPACITANCE: 46.8 pF/Ft Nominal

VEL OF PROP: 55%

IMPEDANCE: 39 OHMS

RESISTANCE: 6.92 OHMS D.C. PER 1000 Ft @ 68 DEG. F Maximum

TEMP/VOLTAGE: 75C / 300V

### COMPLIANCE:

UL 444 CMP by (UL) / NEC ARTICLE 800 / CSA C22.2 by (UL), RoHS Compliant

### MARKING ON JACKET:

18 AWG 6/C E57497 C(UL)US CMP/CL3P/FPLP 75C -- CMP FT6 MADE IN USA ROHS-2 COMPLIANT


FOOTAGE MARKS: FOOTMARK IN ASCENDING ORDER

## DESCRIPTION

18/6 Stranded Bare Copper Conductors, Shielded with an overall jacket, 1000ft Spool, CMP/CL3P

## FEATURES

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- UL Listed to UL444 and UL13, RoHS
- 1000ft Spool

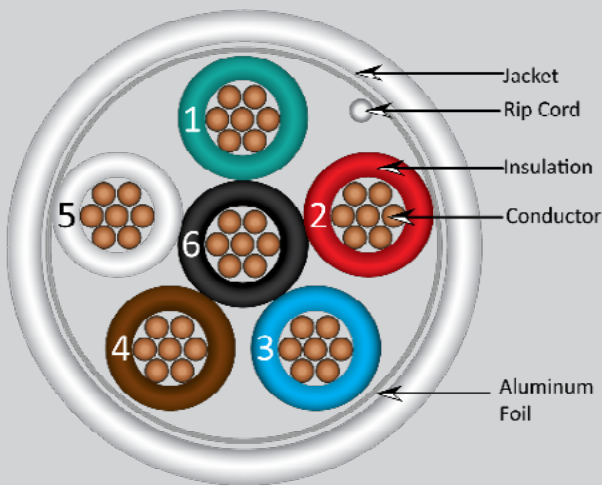

**VERTICAL CABLE**

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 3/2018

Specs subject to change without notice.  
It is the sole responsibility of the user to have the most current specs.