

14AWG 2 CONDUCTOR STRANDED (41 STRAND)




DESCRIPTION

14AWG, 2 Conductor, Stranded (41 Strand),
PVC Jacket, Pull Box, 500ft. Made in USA.

APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound / Audio
- Power Limited Control Circuits
- Indoor Applications
- CL3R, CMR (Riser Rated)

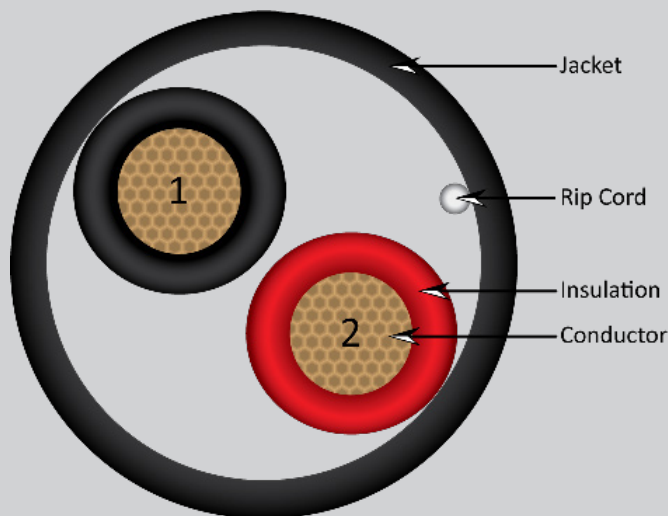

SKU: 309-2080/5BK

Conductor

Material	2 Core (Stranded) Oxygen Free Bare Copper
Size	14 AWG
Stranding	41 Strand

Insulation

Material	PVC
Thickness	.0125"
Colors	Black, Red

Jacket

Material	PVC
Thickness	.015"
Outer Diameter	0.215"
Color	Black

Ripcord

Material	High Strength Polyester
----------	-------------------------

Electrical Performance


Rated Temperature	-20C° to 75C°
Voltage Rating	300 Volt RMS
DC Resistance	2.62Ω/1000FT

Flame Rating	UL 1666
Approvals	UL Type CMR, CL3R UL Subject 13, 444 NEC Article 725, 800

Marking on Jacket

4010346 14AWG 2 COND. STRANDED OXYGEN FREE 75C CMR c(ETL)us
FT4 CL3 ROHS COMPLIANT MADE IN USA XXXX FT

SEQUENTIAL FOOT MARKERS ON JACKET



MADE IN USA

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 04/2018

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.