

14AWG 2 CONDUCTOR STRANDED (41 STRAND)




DESCRIPTION

14AWG, 2 Conductor, Stranded (41 Strand),
PVC Jacket, Pull Box, 500ft. Made in USA.

APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound / Audio
- Power Limited Control Circuits
- Indoor Applications
- CL3R, CMR (Riser Rated)

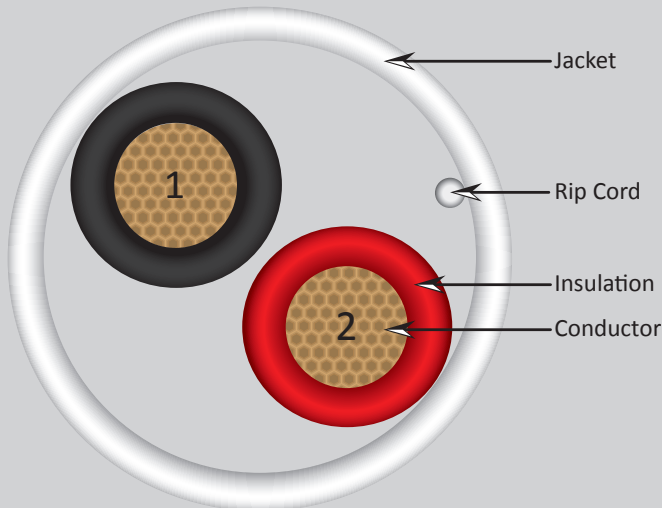

SKU: 309-2090/5WH

Conductor
Material: Oxygen Free Bare Copper
Size: 14 AWG
Stranding: 41 Strand

Insulation
Material: PVC
Thickness: .0125"
Colors: Black, Red

Jacket
Material: PVC
Thickness: .015"
Outer Diameter: 0.215"
Color: White

Ripcord
Material: High Strength Polyester


Electrical Performance
Rated Temperature: -20C° to 75C°
Voltage Rating: 300 Volt RMS
DC Resistance: 2.62Ω/1000FT

Flame Rating: UL 1666
Approvals: UL Type CMR, CL3R
UL Subject 13, 444
NEC Article 725, 800

Marking on Jacket

4010346 14AWG 2 COND. STRANDED OXYGEN FREE 75C CMR c(ETL)us
FT4 CL3 ROHS COMPLIANT MADE IN USA XXXX FT

SEQUENTIAL FOOT MARKERS ON JACKET



MADE IN USA

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 04/2018

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.