

16AWG 4 CONDUCTOR STRANDED (65 STRAND)




DESCRIPTION

16AWG, 4 Conductor, Stranded (65 Strand),
PVC Jacket, Pull Box, 500ft. Made in USA.

APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound / Audio
- Power Limited Control Circuits
- Indoor Applications
- CL3R, CMR (Riser Rated)

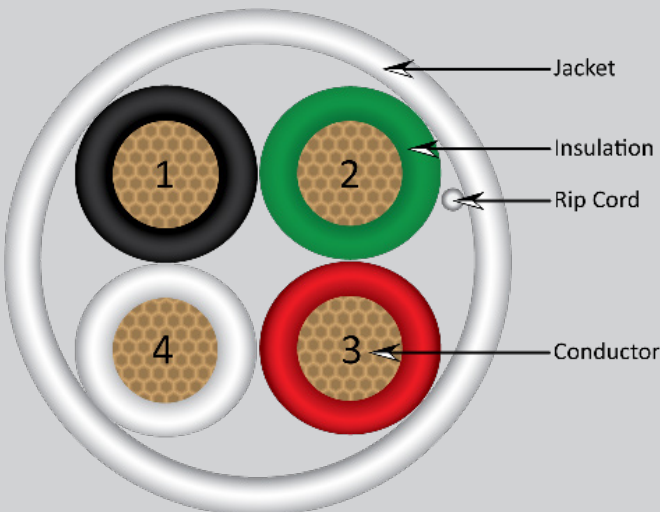

SKU: 309-3050/5WH

Conductor

Material	4 Core (Stranded) Oxygen Free Bare Copper
Size	16 AWG
Stranding	65 Strand

Insulation

Material	PVC
Thickness	.0095"
Colors	Black, Red

Jacket

Material	PVC
Thickness	.015"
Outer Diameter	0.215"
Color	White

Ripcord

Material	High Strength Polyester
----------	-------------------------

Electrical Performance

Rated Temperature	-20C° to 75C°
Voltage Rating	300 Volt RMS
DC Resistance	4.18Ω/1000FT


Flame Rating

Approvals	UL 1666 UL Type CMR, CL3R UL Subject 13, 444 NEC Article 725, 800
-----------	--

Marking on Jacket

4010346 16AWG 4 COND. STRANDED OXYGEN FREE 75C CMR c(ETL)us
FT4 CL3 ROHS COMPLIANT MADE IN USA XXXX FT

SEQUENTIAL FOOT MARKERS ON JACKET



MADE IN USA

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 04/2018

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.