

# 14AWG 4 CONDUCTOR FIRE ALARM CABLE (FPLR-RISER) UNSHIELDED




## SKU: 315-144/R Series

### DESCRIPTION

Fire Alarm Cable, 14/4, Solid, Unshielded, FPLR (Riser), 1000ft Spool

### FEATURES

- Fire Alarm Cable
- FPLR (Power-Limited Fire Alarm Riser Cable)
- Fire protective signal circuit
- Applications: Smoke alarms and detectors, pull boxes, burglar alarms, addressable fire alarm systems
- 14AWG 4 Conductor
- 100% Solid Bare Copper Conductors
- Unshielded
- MADE IN USA
- ETL Listed, RoHS Compliant
- Spool Dimensions: 12'H x 12'D
- 1000ft Spool

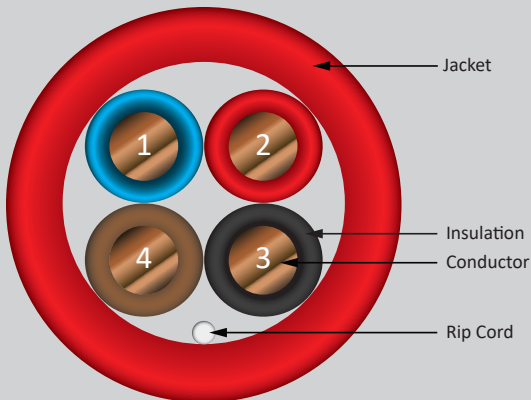

#### Conductor

Material 14AWG Solid Bare Copper  
Conductors 4 Conductor

#### Insulation

Thickness (mm) PVC 0.305  
Colors Blue, Red, Black Brown  
Rip Cord Polyester Rip Cord  
Shield None  
Drain None

#### Jacket

Thickness (mm) PVC 0.381  
Overall Diameter (mm) 6.22

#### Electrical & Physical Properties

Operating Temperature Rating -20°C to +60°C  
Operating Voltage Rating (V RMS) 300  
Resistance @20°C (Ω/1000ft) 2.6  
Weight 66 Lbs./1Mft

#### Ratings/Approvals

NEC Article 760, NFPA 262 Steiner Tunnel Smoke and Flame Test, UL 1424, ETL Listed, RoHS Compliant  
Does not comply with NYC LL5 (Local Law 5)

#### Jacket Print

14 AWG 4C RISER FIRE ALARM CABLE (ETL)us TYPE FPLR 4010346  
MADE IN USA [JULIAN DATE/YR] [LOT#] [XXXX FT]

#### Colors Available

Blue, Red, Yellow

**VERTICAL CABLE**

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 02/2017

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.