

RG59 + 18/2 SIAMESE COAXIAL CABLE




DESCRIPTION

RG59 Siamese, 20AWG CCS Coaxial Cable with 85% CCA Braid and 18AWG Power Cables.

FEATURES

- RG59 Type Coaxial Cable with Power Cable
- Coaxial Cable for CCTV Transmissions
- Siamese Type with Separation Web
- 20AWG Solid Copper Clad Steel
- 85% Braid Coverage For Signal Protection
- Unshielded 18AWG Stranded Power Cables
- Available in 1000ft
- ETL Verified, RoHS Compliant

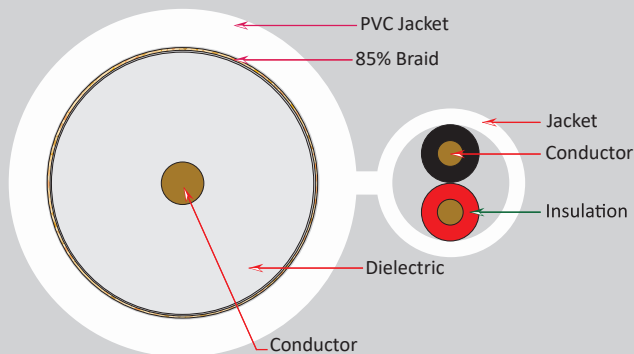

SKU: 107-2322/WH

Conductor	20AWG
Size	0.81±0.1mm
Material	Copper Clad Steel
Dielectric	Foamed PE
Diameter	3.66±0.10mm
Color	White
Braid	85%x16x7x0.12±0.005mm CCA
Jacket	PVC (UL 75 Deg C)
Diameter	6.1±0.10mm
Color	Black
Power Cable	2X 18AWG
Size	7x0.38mm Electroplated CCA
Jacket	1.73mm PVC

Electrical Characteristics

Sparker Test	3000VAC
Impedance	75±3 Ohms
Capacitance	53±3pF/m
Velocity of Propagation	83%
Return Loss	(5~470Mz)≥22dB (470~1000Mz)≥20dB

Mechanical Characteristics

Operating Temp.	-30°C to 70°C
Rating	CL2

ISO9001:2000 RoHS Compliant

Attenuation		[@68° F. (20° C.)]	
Frequency (MHz)	Max. (dB/100 ft.)	Frequency (MHz)	Max. (dB/100 ft.)
5	0.86 4	00 5	.10
55 2	.05	450	5.40
83 2	.45	500	5.70
187	3.60 5	50 5	.95
211	3.80 6	00 6	.20
250	4.10 7	50 6	.97
300	4.45 8	65 7	.52
350	4.80 1	000	8.12

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 10/2014

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.