

# 12" SCREW MOUNT CABLE TIES (50LB TENSILE STRENGTH)



## SKU: 045-CT/M50/12

Max Tensile Strength (lb)	50
Length (in)	12
Width (mm)	4.6
Thickness (mm)	1.3
Hole Diameter (mm)	4.63
Bundle Diameter (mm)	82.8 Max
Color	Natural or Black
Flammability	UL94-V2
Installation Temperature	-10°C ~ +85°C
Working Temperature	-40°C ~ +85°C
Material	Polyamide 6.6 (PA66)

Product is tested in accordance to UL 62275  
"Cable ties for electrical installation"


Good resistance to bases, oils, grease, oil derivatives, chloride solvents.  
Limited resistance to acids. Not resistance to phenols.

## DESCRIPTION

12" Screw Mount Cable Ties 8", 50lb Tensile Strength, 100 Pack.

## FEATURES

- 12" Screw Mount Cable Ties
- 50lb Tensile Strength
- Inside serrations allow for strong hold on cables and wire bundles
- Head design provides high tensile strength with low insertion force
- Bent tail ensures a quick and simple insertion
- Made from PA66 material for longer lasting
- For Indoor and Outdoor use
- UL Listed, RoHS Compliant
- Supplied in 100 Pack

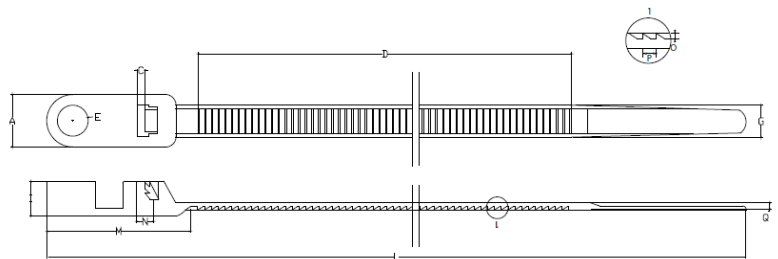

**VERTICAL CABLE**

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 10/2016

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.