

# 18AWG 4 CONDUCTOR FIRE ALARM CABLE (FPLP-Plenum) UNSHIELDED




## DESCRIPTION

Fire Alarm Cable, 18/4, Solid, Unshielded, FPLP (Plenum), 1000ft Spool

## FEATURES

- Fire Alarm Cable
- FPLP (Power-Limited Fire Alarm Plenum Cable)
- Fire protective signal circuit
- Applications: Smoke alarms and detectors, pull boxes, burglar alarms, addressable fire alarm systems
- 18AWG 4 Conductor
- 100% Solid Bare Copper Conductors
- Unshielded
- MADE IN USA
- ETL Listed, RoHS Compliant
- Spool Dimensions: 12"x4"x4"
- 1000ft Spool

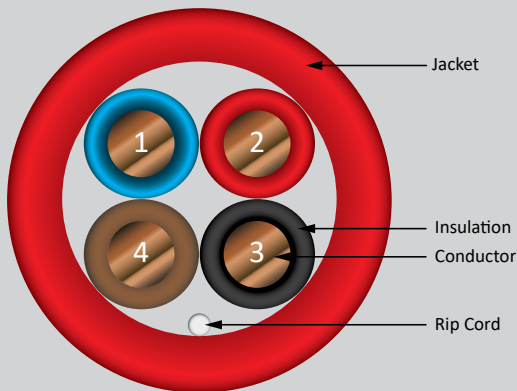

**SKU: 315-184/P/RD**

### Conductor

Material 18AWG Solid Bare Copper  
Conductors 4 Conductor

### Insulation

Thickness (mm) 0.031  
Colors Blue, Red, Black Brown  
Rip Cord Polyester Rip Cord  
Shield None  
Drain None

### Jacket

Thickness (mm) 0.381  
Overall Diameter (mm) 3.94

### Electrical & Physical Properties

Operating Temperature Rating -20°C to +60°C  
Operating Voltage Rating (V RMS) 300  
Resistance @20°C 6.4 Ohms/1M' Nom.  
Weight 19 Lbs./1Mft

### Ratings/Approvals

NEC Article 760, NFPA 262 Steiner Tunnel Smoke and Flame Test, UL 1424, ETL Listed, RoHS Compliant  
Does not comply with NYC LL5 (Local Law 5)

### Jacket Print

18 AWG 4C PLENUM FIRE ALARM CABLE (ETL)us TYPE FPLP 4010346  
MADE IN USA [JULIAN DATE/YR] [LOT#] [XXXX FT]

### Colors Available

Blue, Red, Yellow

### Color

Red



**VERTICAL CABLE**

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 02/2017

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.