

18AWG 4 CONDUCTOR FIRE ALARM CABLE (FPLR-RISER) UNSHIELDED




SKU: 315-184/R/RD

DESCRIPTION

Fire Alarm Cable, 18/4, Solid, Unshielded, FPLR (Riser), 1000ft Spool

FEATURES

- Fire Alarm Cable
- FPLR (Power-Limited Fire Alarm Riser Cable)
- Fire protective signal circuit
- Applications: Smoke alarms and detectors, pull boxes, burglar alarms, addressable fire alarm systems
- 18AWG 4 Conductor
- 100% Solid Bare Copper Conductors
- Unshielded
- MADE IN USA
- ETL Listed, RoHS Compliant
- Spool Dimensions: 12"x4"x4"
- 1000ft Spool

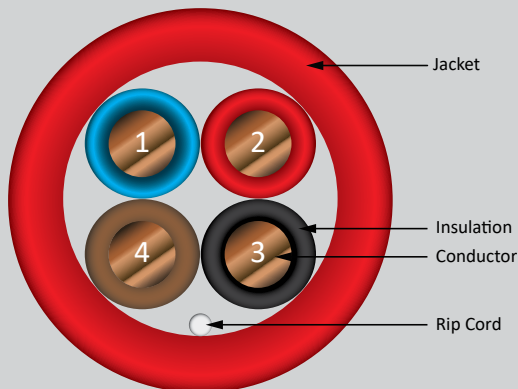

Conductor

Material 18AWG Solid Bare Copper
Conductors 4 Conductor

Insulation

Thickness (mm) FR-PVC 0.229
Colors Blue, Red, Black Brown
Rip Cord Polyester Rip Cord
Shield None
Drain None

Jacket

Thickness (mm) FR-PVC 0.381
Overall Diameter (mm) 4.32

Electrical & Physical Properties

Operating Temperature Rating -20°C to +60°C
Operating Voltage Rating (V RMS) 300
Resistance @20°C 6.4 Ohms/1M' Nom.
Weight 31 Lbs./1Mft

Ratings/Approvals

NEC Article 760, NFPA 262 Steiner Tunnel Smoke and Flame Test, UL 1424, ETL Listed, RoHS Compliant
Does not comply with NYC LL5 (Local Law 5)

Jacket Print

18 AWG 4C RISER FIRE ALARM CABLE (ETL)us TYPE FPLR 4010346
MADE IN USA [JULIAN DATE/YR] [LOT#] [XXXX FT]

Colors Available

Red

Color

Red



VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York

www.verticalcable.com

Rev. 02/2017

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.