


## DESCRIPTION

14AWG, 4 Conductor, Stranded (41 Strand), PVC Jacket, Pull Box, 500ft. Made in USA.

#### **APPLICATION**

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound / Audio
- Power Limited Control Circuits
- Indoor Applications
- CL3R, CMR (Riser Rated)

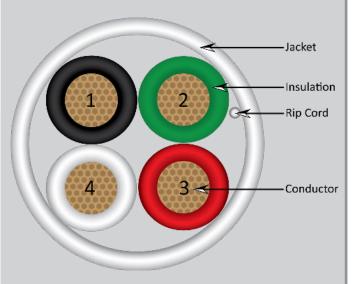

# **14AWG 4 CONDUCTOR** STRANDED (41 STRAND)

### SKU: 309-3010/5WH

Conductor 4 Core (Stranded)

Material Oxygen Free Bare Copper

Size 14 AWG Stranding 41 Strand

Insulation

Material PVC Thickness .0125"

Colors Black, Red, Green, White

**Jacket** 

Material PVC
Thickness .015"
Outer Diameter 0.260"
Color White

Ripcord

Material High Strength Polyester

**Electrical Performance** 

Rated Temperature -20C° to 75C° Voltage Rating 300 Volt RMS DC Resistance 2.62 $\Omega$ /1000FT

Flame Rating UL 1666

Approvals UL Type CMR, CL3R UL Subject 13, 444

UL Subject 13, 444 NEC Article 725, 800

**Marking on Jacket** 

4010346 14AWG 4 COND. STRANDED OXYGEN FREE 75C CMR c(ETL)us FT4 CL3 ROHS COMPLIANT MADE IN USA XXXX FT

SEQUENTIAL FOOT MARKERS ON JACKET





### **VERTICAL CABLE**

951.696.7772 California 800.749.2447 Florida 845.391.8318 New York