


DESCRIPTION

18AWG, 4 Conductor, Stranded (16 Strand), PVC Jacket, Pull Box, 500ft. Made in USA.

APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound / Audio
- Power Limited Control Circuits
- Indoor Applications
- CL3R, CMR (Riser Rated)

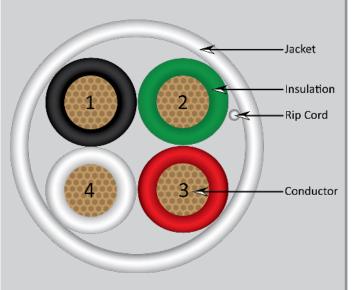

18AWG 4 CONDUCTOR STRANDED (16 STRAND)

SKU: 309-3090/5WH

Conductor 4 Core (Stranded)

Material Oxygen Free Bare Copper

Size 18 AWG Stranding 16 Strand

Insulation

Material PVC
Thickness .0095"
Colors Black, Red

Jacket

MaterialPVCThickness.015"Outer Diameter0.190"ColorWhite

Ripcord

Material High Strength Polyester

Electrical Performance

Rated Temperature -20C° to 75C° Voltage Rating 300 Volt RMS DC Resistance 6.66 Ω /1000FT

Flame Rating UL 1666

Approvals UL Type CMR, CL3R UL Subject 13, 444

UL Subject 13, 444 NEC Article 725, 800

Marking on Jacket

4010346 18AWG 4 COND. STRANDED OXYGEN FREE 75C CMR c(ETL)us FT4 CL3 ROHS COMPLIANT MADE IN USA XXXX FT

SEQUENTIAL FOOT MARKERS ON JACKET





VERTICAL CABLE

951.696.7772 California 800.749.2447 Florida 845.391.8318 New York